

The logo for Urban Surfaces, featuring the word "URBAN" in a large, bold, sans-serif font, with "SURFACES" in a smaller, all-caps, sans-serif font directly below it. A thin, dark diagonal line cuts across the letters of "URBAN".

URBAN
SURFACES

PRODUCT LINEUP CATALOG

6 mil

**Build Upon
A Strong
Foundation.**



6MIL SCRATCHGUARD WEAR LAYER

Effective Wear Protection

NATURAL WOOD TEXTURE

Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM

Highly Stain Resistant

Hansen Creek Floating 1905 | GlueDown 1105

10
YEARS

RESIDENTIAL
WARRANTY

3

YEARS

LIGHT
COMMERCIAL
WARRANTY

FLOATING FLOOR

FOUNDATIONS




SOUND
REDUCING



100%
WATERPROOF



EASY TO
CLEAN

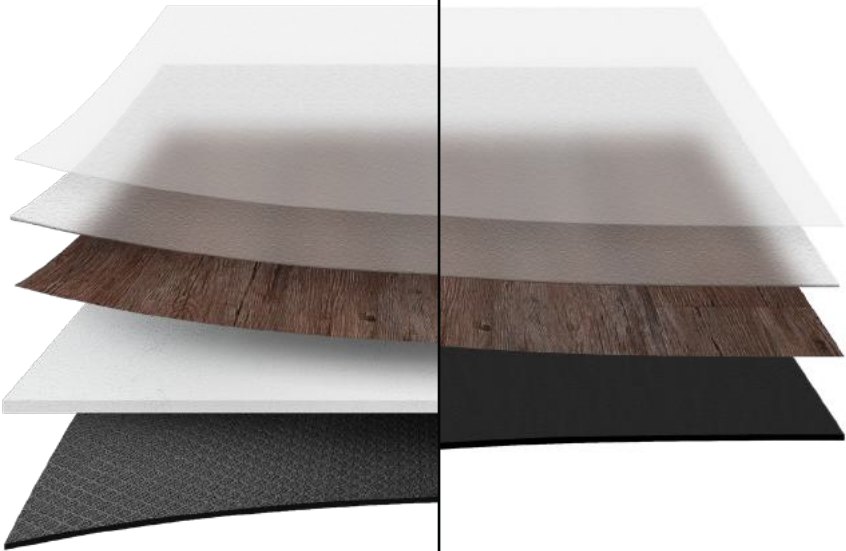

3.5MM HIGH-DENSITY CORE

- Engineered for Structural Stability
- Waterproof SPC
- Limestone Base

1MM SOUND-REDUCING UNDERLAYMENT

- Surpasses STC and IIC Sound Requirements
- Provides Extra Comfort

GLUEDOWN

FOUNDATIONS



EASY TO
CLEAN



100%
WATERPROOF



EASY
REPAIR

1.6MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

NATURAL WOOD TEXTURE

- Ultra Realistic Look
- Focused Color Selection



Plank Size _____ 7" x 48"
Wear Layer _____ 6mil ScratchGuard
Edge Profile _____ Square Edge
LEED Scorecard _____ EQ 4.3 - 1 Point





Mission Bay
Floating 1901
GlueDown 1101




Carvins Cove
Floating 1902
GlueDown 1102



Sonora Heights
Floating 1903
GlueDown 1103



Newport Landing
Floating 1904
GlueDown 1104

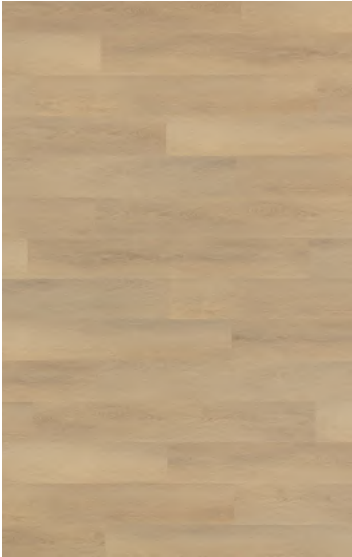

Hansen Creek
Floating 1905
GlueDown 1105



Rochester Springs
Floating 1906
GlueDown 1106



Balboa Trails
Floating 1907
GlueDown 1107



Longview Point
Floating 1908
GlueDown 1108



Carvins Cove Floating 1902 | GlueDown 1102

8mil

MAIN|STREET

8MIL LVP GLUEDOWN FLOORING

8MIL SCRATCHGUARD WEAR LAYER

Effective Wear Protection

NATURAL WOOD TEXTURE


Ultra-Realistic Look
Focused Color Selection



View
Products

Presidio 8306

**Delivering Lasting
Value To The Home.**

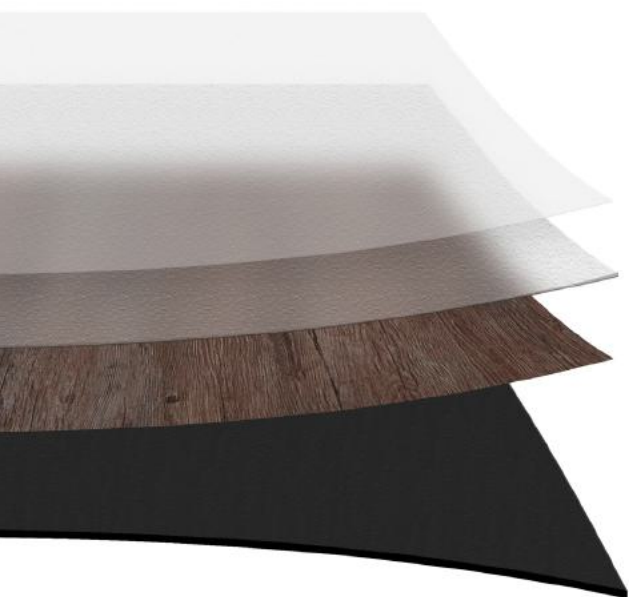

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant

2MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

**8MIL SCRATCHGUARD
WEAR LAYER**

- Effective Wear Protection

NATURAL WOOD TEXTURE

- Ultra Realistic Look
- Focused Color Selection



**100%
WATERPROOF**



DURABLE



**EASY TO
CLEAN**



**EASY
REPAIR**

WARRANTIES


Residential _____ 15 Years
Light Commercial _____ 5 Years

Guaranteed Phthalate Free

Core _____ Pure Vinyl
Plank Size _____ 7" x 48"
Thickness _____ 2mm
Wear Layer _____ 8mil ScratchGuard
Edge Profile _____ Square
Installation _____ GlueDown
LEED Scorecard _____ EQ 4.3 - 1 Point



Twilight 8051

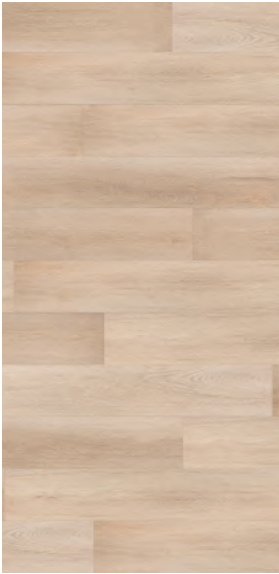

Briscoe
8123



Hudson
8071



Aspen
8070



Sierra
8060



Marquette
8061



Midland Grey
8050



Twilight
8051



Barn Owl
8122



Ash
8307



Presidio
8306

12 mil

**Finish Projects
On Time And
Under Budget.**



12MIL SCRATCHGUARD WEAR LAYER

Extra Wear Protection

NATURAL WOOD TEXTURE

Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM

Highly Stain Resistant

Berlin Terrace Floating 2014 | GlueDown 2114

20
YEARS

RESIDENTIAL
WARRANTY

10
YEARS

LIGHT
COMMERCIAL
WARRANTY

FLOATING FLOOR

STUDIO 12

GLUEDOWN

STUDIO 12



SOUND
REDUCING



100%
WATERPROOF



EASY TO
CLEAN




HIGHLY
DURABLE



100%
WATERPROOF



EASY TO
CLEAN

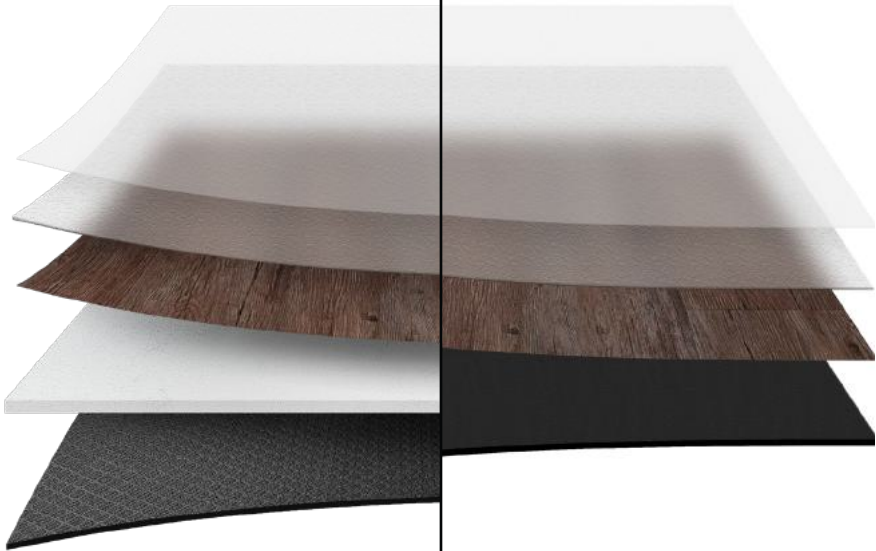

4MM HIGH-DENSITY CORE

- Engineered for Structural Stability
- Waterproof SPC
- Limestone Base

1MM SOUND-REDUCING UNDERLAYMENT

- Surpasses STC and IIC Sound Requirements
- Provides Extra Comfort

2MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

NATURAL WOOD TEXTURE

- Ultra Realistic Look
- Focused Color Selection



Plank Size _____ 7" x 48"

Wear Layer _____ 12mil ScratchGuard

Embossing _____ Natural Wood Texture

LEED Scorecard _____ EQ 4.3 - 1 Point





Pearl
Floating 2901
GlueDown 2101



Bristol Harbor
Floating 2907
GlueDown 2107



Whispering Pines
Floating 2908
GlueDown 2108



Bedford Creek
Floating 2910
GlueDown 2110



Sandpiper Spring
Floating 2909
GlueDown 2109



Arrowhead
Floating 2903
GlueDown 2103



Cobble Hill
Floating 2911
GlueDown 2111



Yosemite
Floating 2999
GlueDown 2199




Willow Run
Floating 2912
GlueDown 2112



Berlin Terrace
Floating 2914
GlueDown 2114



Chestnut
Floating 2906
GlueDown 2106

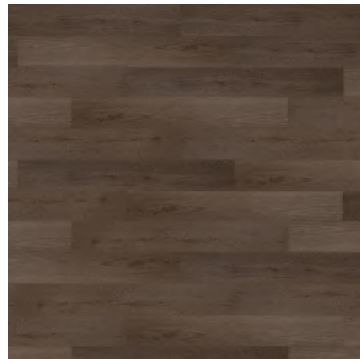

Hidden Acres
Floating 2913
GlueDown 2113



Whispering Pines Floating 2908 | GlueDown 2108

20 mil



20MIL SCRATCHGUARD WEAR LAYER

Commercial Wear Protection

NATURAL WOOD TEXTURE


Ultra-Realistic Look
Wide Color Selection



View
Products

Dakota Way 7509

**Exceptional
Performance
For Commercial
Environments.**

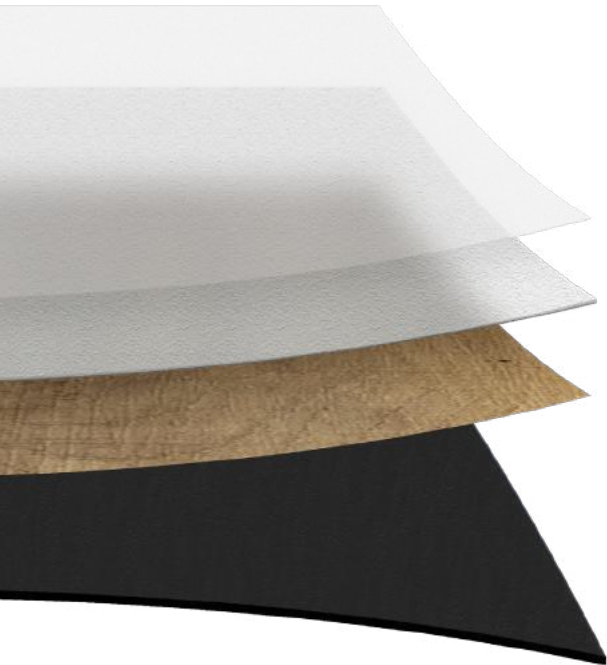

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant

3MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

**20MIL SCRATCHGUARD
WEAR LAYER**

- Commercial Wear Protection

NATURAL WOOD TEXTURE

- Ultra Realistic Look
- Focused Color Selection



100%
WATERPROOF



DURABLE



EASY TO
CLEAN



EASY
REPAIR

WARRANTIES

Residential _____ Lifetime
Light Commercial _____ 20 Years
Commercial _____ 15 Years

Guaranteed Phthalate Free

Core _____ Pure Vinyl
Plank Size _____ 7" x 48"
Thickness _____ 3mm
Wear Layer _____ 20mil ScratchGuard
Edge Profile _____ Beveled
Installation _____ GlueDown
LEED Scorecard _____ EQ 4.3 - 1 Point




Boardwalk 7503



Canal Street
7501




Sixth Avenue
7527

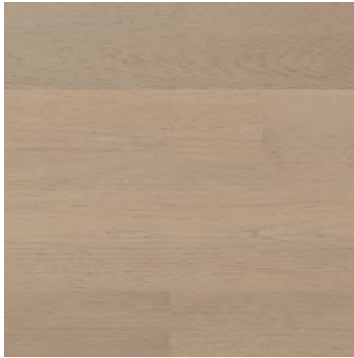

Charlton Plaza
7526



Sullivan Street
7502

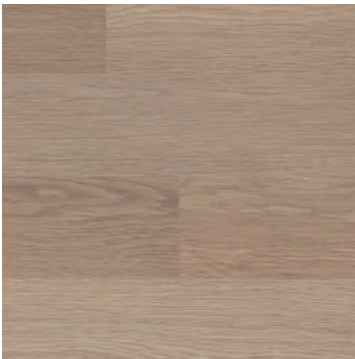


Wooster Street
7505



Dakota Way
7509




Sedona Bridge
7508

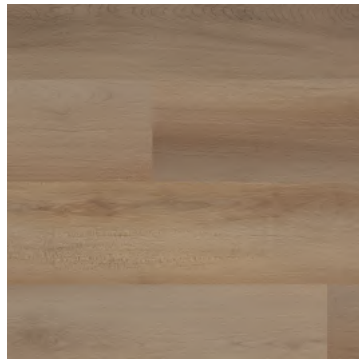


Crosby Street
7507



Boardwalk
7503

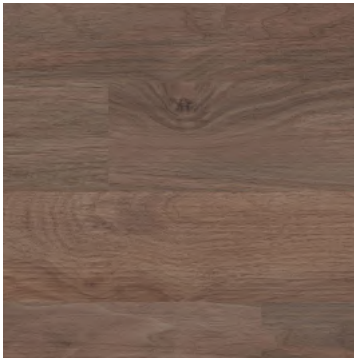

West Broadway
7524

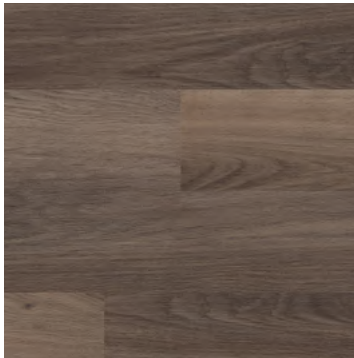

Waverly Place
7504



Courtland Alley
7528

20mil



20MIL SCRATCHGUARD WEAR LAYER

Commercial Wear Protection

CERAMIC BEAD SCRATCH ARMOR


Extra Protection Against
Scratches



View
Products

Navajo 9563

**Forever
Waterproof
& Sound
Reducing.**

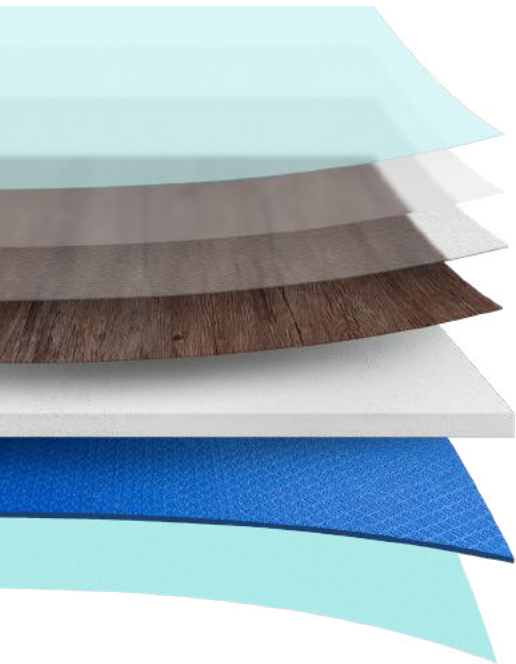

**ANTI-MICROBIAL
WEAR LAYER**

- Protects Against Mold and Mildew on the Surface

**4.5MM HIGH-DENSITY
CORE**

- Engineered for Structural Stability
- Waterproof SPC
- Limestone Base

**NATURAL WOOD
TEXTURE**

- Ultra-Realistic Look
- Refined Color Selection

**1.5MM SOUND-REDUCING
UNDERLAYMENT**

- Surpasses STC and IIC Sound Requirements
- Provides Extra Comfort

**ANTI-MICROBIAL
PAD PROTECTION**

- Protects Against Mold and Mildew Underneath the Floor

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant



**SOUND
REDUCING**



**100%
WATERPROOF**



**ANTI
MICROBIAL**



**CERAMIC BEAD
SCRATCH ARMOR**

WARRANTIES

Residential _____ Lifetime
Light Commercial _____ 20 Years
Commercial _____ 15 Years

Guaranteed Phthalate Free


Core _____ Stone Polymer Composite
Plank Size _____ 7" x 48"
Thickness _____ 6mm
Wear Layer _____ 20mil ScratchGuard
Edge Profile _____ Beveled
Installation _____ Floating
LEED Scorecard _____ EQ 4.3 - 1 Point




Sixth Avenue
9527



Pembroke
9511

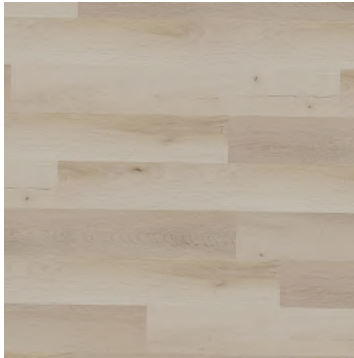


Caspian Heights
9520

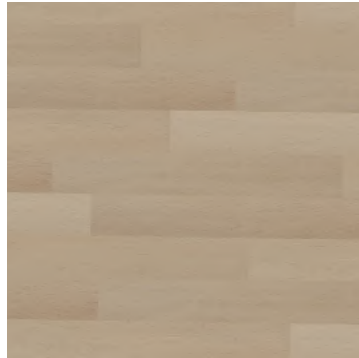

Charlton Plaza
9526



Navajo
9563

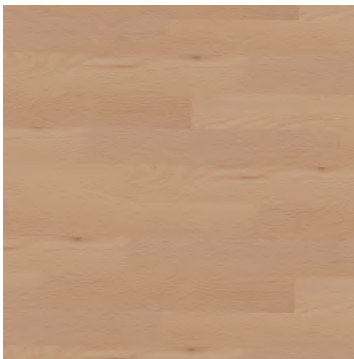

Astoria
9521



Yosemite
9599



Boardwalk
9503




Dakota Way
9509



Cheyenne
9553



Sedona Bridge
9508

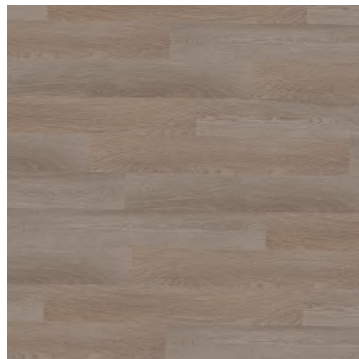

Avondale
9529



Monterey
9510



Kodiak
9537



West Broadway
9524



Cambridge
9523



Midland Grey
9525



Twilight
9505



Stormy Sky
9557



La Jolla
9516




Alamo
9538



Courtland Alley
9508



Midnight Grey
9573

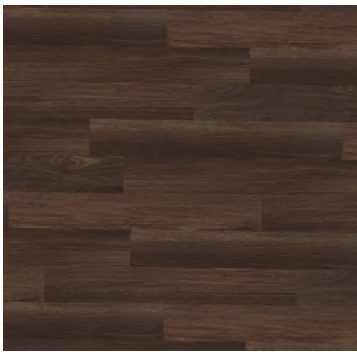

Fairbanks
9534

20 mil



20MIL SCRATCHGUARD WEAR LAYER

Commercial Wear Protection

CERAMIC BEAD SCRATCH ARMOR


Extra Protection Against
Scratches



View
Products

Joshua Tree 9713

Care-Free Flooring.

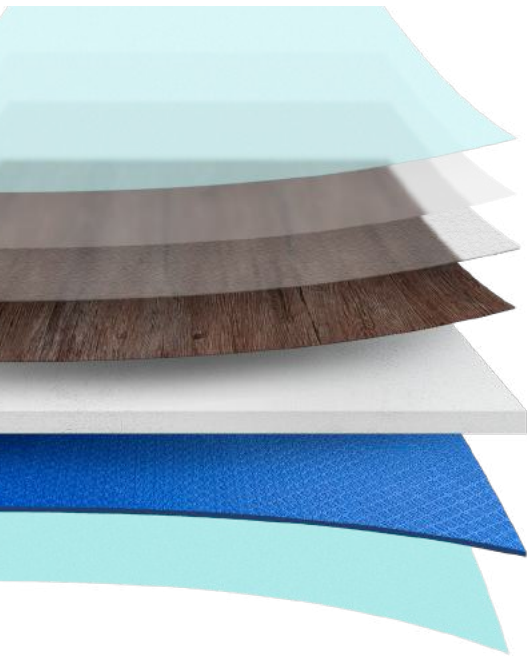

**ANTI-MICROBIAL
WEAR LAYER**

- Protects Against Mold and Mildew on the Surface

**NATURAL WOOD
TEXTURE**

- Ultra-Realistic Look
- Refined Color Selection

**ANTI-MICROBIAL
PAD PROTECTION**

- Protects Against Mold and Mildew Underneath the Floor

**4.5MM HIGH-DENSITY
CORE**

- Engineered for Structural Stability
- Waterproof SPC
- Limestone Base

**1.5MM SOUND-REDUCING
UNDERLAYMENT**

- Surpasses STC and IIC Sound Requirements
- Provides Extra Comfort

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant



**SOUND
REDUCING**



**100%
WATERPROOF**



**ANTI
MICROBIAL**



**CERAMIC BEAD
SCRATCH ARMOR**

WARRANTIES

Residential _____ Lifetime
Light Commercial _____ 20 Years
Commercial _____ 15 Years

Guaranteed Phthalate Free

Core _____ Stone Polymer Composite
Plank Size _____ 9" x 60"
Thickness _____ 6mm
Wear Layer _____ 20mil ScratchGuard
Edge Profile _____ Painted Bevel
Installation _____ Floating
LEED Scorecard _____ EQ 4.3 - 1 Point



Mesa Verde 9714



Biscayne Bay
9711



Mesa Verde
9714



Joshua Tree
9713



Mount Rainier
9707



Pinnacle Grove
9715



Mount Olympia
9712



Yellowstone
9706



Acadia
9704

20mil



20MIL SCRATCHGUARD WEAR LAYER

Commercial Wear Protection

REALISTIC STONE LOOK


Ultra-Realistic Look
Focused Color Selection



View
Products

Obsidian 9603

**Rock Solid,
Long Lasting
Stone Looks.**

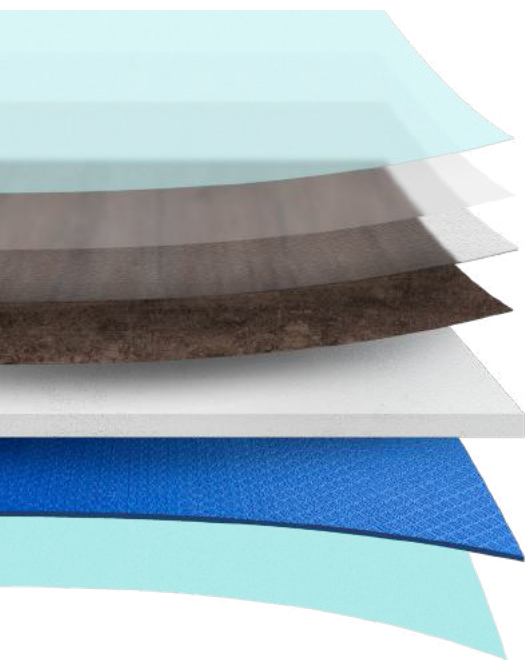

ANTI-MICROBIAL WEAR LAYER

- Protects Against Mold and Mildew on the Surface

CERAMIC BEAD SCRATCH ARMOR

- Extra Protection Against Scratches

ANTI-MICROBIAL PAD PROTECTION

- Protects Against Mold and Mildew Underneath the Floor

4.5MM HIGH-DENSITY CORE

- Engineered for Structural Stability
- Waterproof SPC
- Limestone Base

1.5MM SOUND-REDUCING UNDERLAYMENT

- Surpasses STC and IIC Sound Requirements
- Provides Extra Comfort

ENHANCED POLYURETHANE SYSTEM

- Highly Stain Resistant



**SOUND
REDUCING**



**100%
WATERPROOF**



**ANTI
MICROBIAL**




**CERAMIC BEAD
SCRATCH ARMOR**

WARRANTIES


Residential _____ Lifetime
Light Commercial _____ 20 Years
Commercial _____ 15 Years

Guaranteed Phthalate Free


Core _____ Stone Polymer Composite
Plank Size _____ 12" x 24"
Thickness _____ 6mm
Wear Layer _____ 20mil ScratchGuard
Edge Profile _____ Beveled
Installation _____ Floating
LEED Scorecard _____ EQ 4.3 - 1 Point

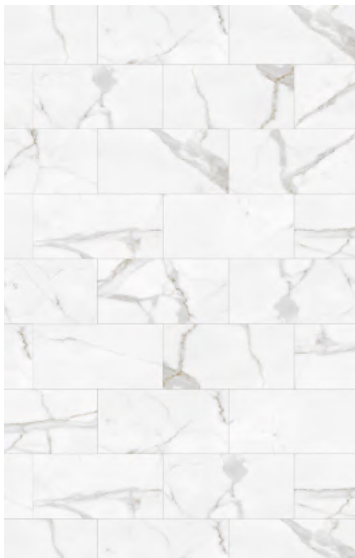

Electra
9609

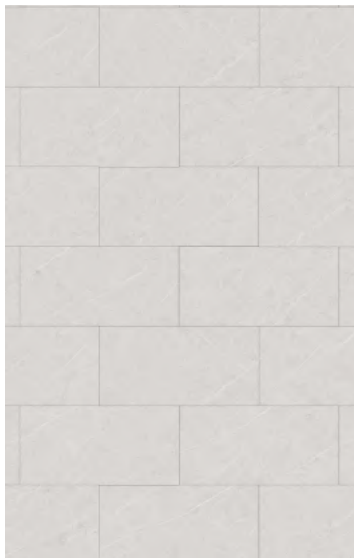

Vega
9610

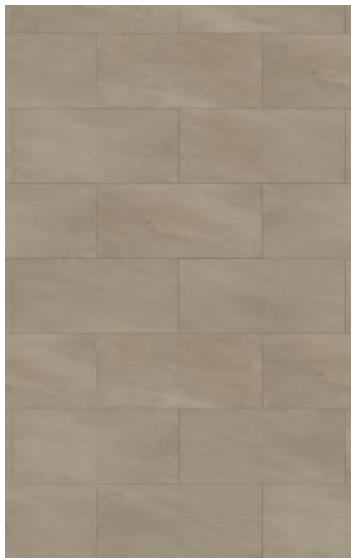

Astella
9608



Solstice
9606




Nova
9607



Luna
9605



Meteor
9604

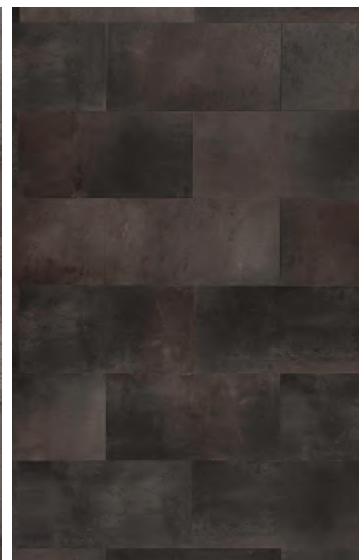

Obsidian
9603



Meteor 9604

20mil

INSTAGRIP 20
20MIL LOOSELAY FLOORING

20MIL SCRATCHGUARD WEAR LAYER

Superior Wear Protection

INSTALL OPTIONS

Traction Subfloor Coating
Full-Spread Adhesive
Minimal Adhesive
Double-Sided Tape



View
Products

Asbury 1201

**Unbeatable
Durability.**



**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant

4.5MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

**NATURAL WOOD
TEXTURE**

- Ultra-Realistic Look
- Refined Color Selection

**FIBERGLASS
STABILIZATION LAYER**

- Increased Dimensional Stability

GRIP-TEC BACKING

- Anti-Slip Backing



**100%
WATERPROOF**



**EASY
TO INSTALL**



**DUSTLESS
INSTALLATION**



**EASY
REPAIR**

WARRANTIES


Residential _____ Lifetime
Light Commercial _____ 20 Years
Commercial _____ 15 Years

Guaranteed Phthalate Free


Core _____ Pure Vinyl
Plank Size _____ 9" x 60"
Thickness _____ 4.5mm
Wear Layer _____ 20mil ScratchGuard
Edge Profile _____ Beveled
Installation _____ Traction / Adhesive / Tape
LEED Scorecard _____ EQ 4.3 - 1 Point



Lighthouse
1206

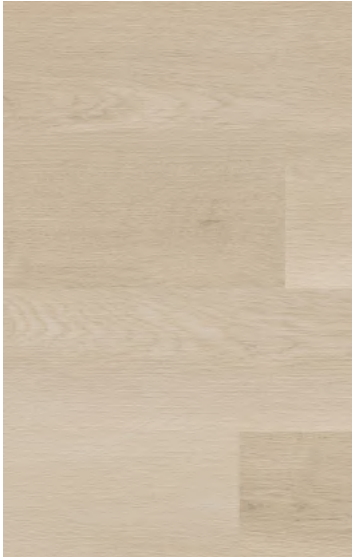

Cape Cod
1202

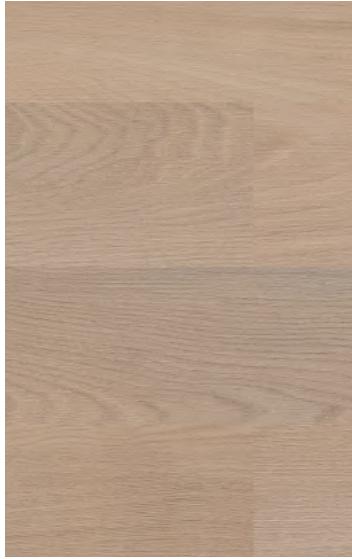

Asbury
1201



Sandbridge
1203



Yosemite
1299



Scarborough
1204



Sagamore Hill
1205



West Broadway
1224



Scarborough 1204

28mil



28MIL SCRATCHGUARD WEAR LAYER

Superior Wear Protection

INSTALL OPTIONS


Traction Subfloor Coating
Full-Spread Adhesive
Minimal Adhesive
Double-Sided Tape



View
Products

Hollister 1005

**Unbeatable
Durability.**

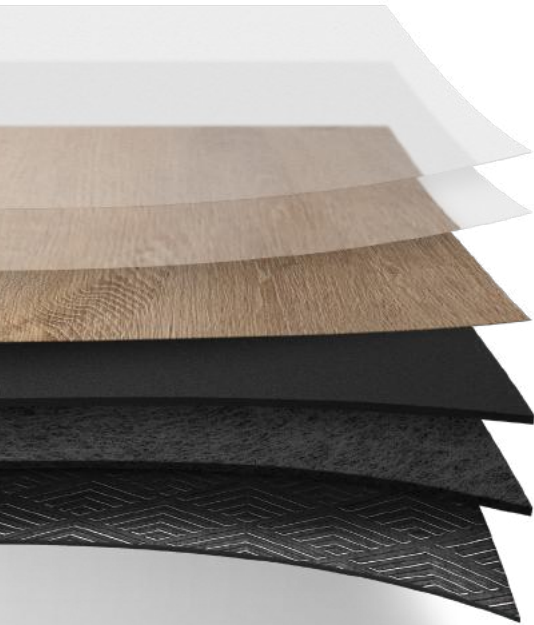

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant

**FIBERGLASS
STABILIZATION LAYER**

- Increased Dimensional Stability

5MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

GRIP-TEC BACKING

- Anti-Slip Backing

**NATURAL WOOD
TEXTURE**

- Ultra-Realistic Look
- Refined Color Selection



100%
WATERPROOF



EASY
TO INSTALL



DUSTLESS
INSTALLATION



EASY
REPAIR

WARRANTIES

Residential _____ Lifetime
Light Commercial _____ Lifetime
Commercial _____ 20 Years

Guaranteed Phthalate Free

Core _____ Pure Vinyl
Plank Size _____ 9" x 48"
Thickness _____ 5mm
Wear Layer _____ 28mil ScratchGuard
Edge Profile _____ Beveled
Installation _____ Traction / Adhesive / Tape
LEED Scorecard _____ EQ 4.3 - 1 Point



Coronado
1004



Laguna
1007



Pismo
1003



Avalon
1002



Hollister
1005



Moonstone
1001



Woods Cove
1006



Doheny
1008



Avalon 1002

28 mil

INSTAGRIP28TILE
28MIL LOOSELAY FLOORING

28MIL SCRATCHGUARD WEAR LAYER

Superior Wear Protection

INSTALL OPTIONS


Traction Subfloor Coating
Full-Spread Adhesive
Minimal Adhesive
Double-Sided Tape



View
Products

Stratus 1030

**Unbeatable
Durability.**

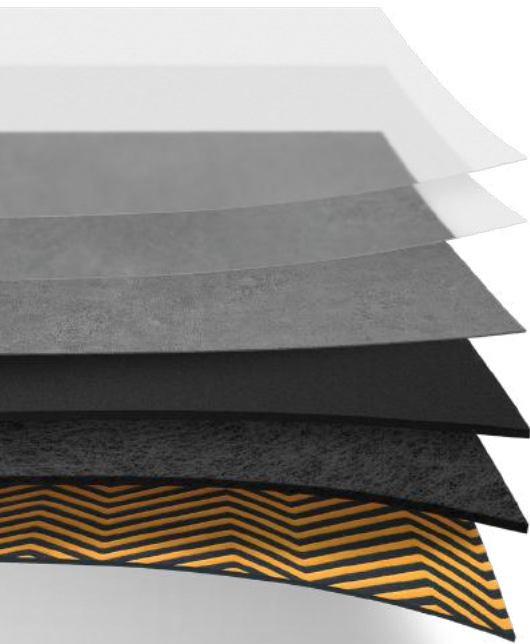

**ENHANCED
POLYURETHANE SYSTEM**

- Highly Stain Resistant

5MM PURE VINYL

- Chip and Dent Resistant
- 100% Waterproof

STONE TILE AESTHETIC

- Sophisticated Industrial Look
- Ultra-Realistic Style
- Tactile Stone Feel

**FIBERGLASS
STABILIZATION LAYER**

- Increased Dimensional Stability

GRIP-TEC BACKING

- Anti-Slip Backing



**100%
WATERPROOF**



**EASY
TO INSTALL**



**DUSTLESS
INSTALLATION**



**EASY
REPAIR**

WARRANTIES

Residential _____ Lifetime
Light Commercial _____ Lifetime
Commercial _____ 20 Years

Guaranteed Phthalate Free

Core _____ Pure Vinyl
Plank Size _____ 36" x 36"
Thickness _____ 5mm
Wear Layer _____ 28mil ScratchGuard
Edge Profile _____ Beveled
Installation _____ Traction / Adhesive / Tape
LEED Scorecard _____ EQ 4.3 - 1 Point



Stratus
1030



Cloudburst
1031



Aurora
1032



Landfall
1033



Thunderhead
1034



Eclipse
1035



Aurora 1032

Exact-Match Moldings

Our moldings provide clean and beautiful transitions with exact matches for every one of our Floating Floor designs. These highly wear-resistant and 100% waterproof moldings are robustly built to blend.



End Cap
94"

End Caps are used in a number of different applications, especially when ending runs against vertical surfaces.



2-in-1 Slim Trim (SLT)
94"

Works as a Reducer, but also serves as a T-Molding when connecting even surfaces.



Low Profile End Cap
94"

Low Profile is perfect for areas where no base molding can be installed (such as bathtubs).



T-Molding
94"

Bridges two surfaces of equal height. The low-profile look makes a beautiful transition.



Quarter Round
96"

So quick and easy that baseboards don't even need to be removed in order to install.



Reducer
94"

Where flooring of different heights meet, the Reducer adds a gentle slope between.



Premium Stair Finishing

Urban Surfaces' stair-finishing products provide stylish and durable stair solutions with exact-match designs.



InstaGrip Stair Nose New
94"

This broad and beautiful stair nose installs flush and gives your install a stylish appearance.



White SPC Stair Riser New
7 1/4" x 48"

Pairs perfectly with our stair treads. White SPC with a 3 mil wear layer and UV protection.




Square Edge Stair Nose New
94"

For that modern Square Edge look, with a more classical installation and approach.



Square Edge Stair Tread New
11 3/4" x 51 5/8"

Installs quickly and provides a perfect finish every time. Put an end to on-site retrofitting.




Metal Stair Nose
96"

When floating floors require a more contemporary approach.




Stair Nose
94"


This classic nosing can be installed flush or overlapping, depending on the desired finish.

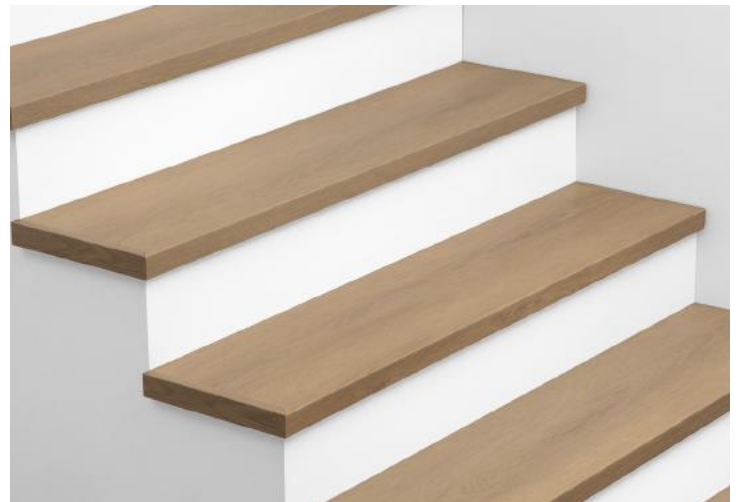

Molding Type		<div>ST</div> <div>Sound-Tec</div>	<div>STP</div> <div>Sound-Tec Plus</div>	<div>STT</div> <div>Sound-Tec Tile</div>	<div>S12</div> <div>Studio 12</div>	<div>FF</div> <div>Foundations</div>	<div>IG</div> <div>InstaGrip</div>
	Slim Trim (SLT)	✓	✓	✓	✓	✓	
	Low Profile End Cap	✓	✓	✓			
	Reducer	✓	✓	✓	✓	✓	
	End Cap	✓	✓	✓	✓	✓	
	T-Molding	✓	✓	✓	✓	✓	
	Stair Nose	✓	✓		✓	✓	
	Quarter Round				✓	✓	
	Metal Stair Nose	✓	✓	✓			
	InstaGrip Stair Nose						✓
	Square Edge Stair Tread	✓	✓		✓	✓	
	Square Edge Stair Nose	✓	✓		✓	✓	

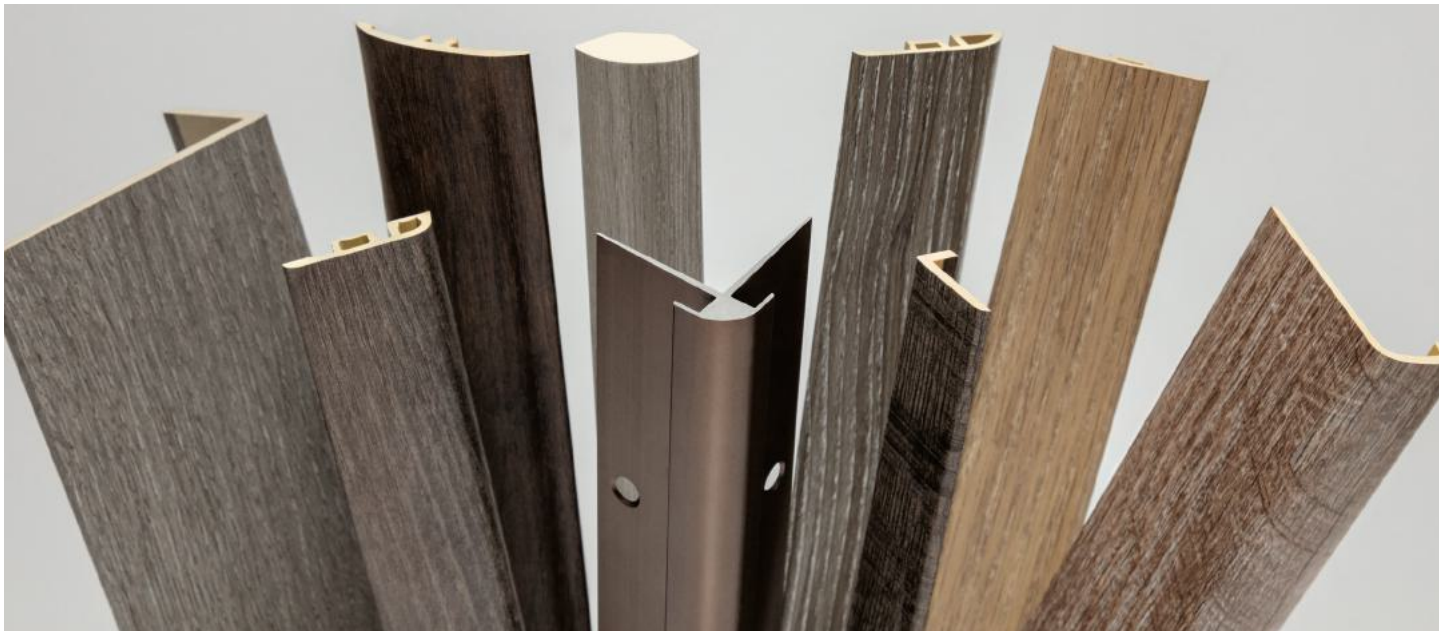

Where beauty meets function.

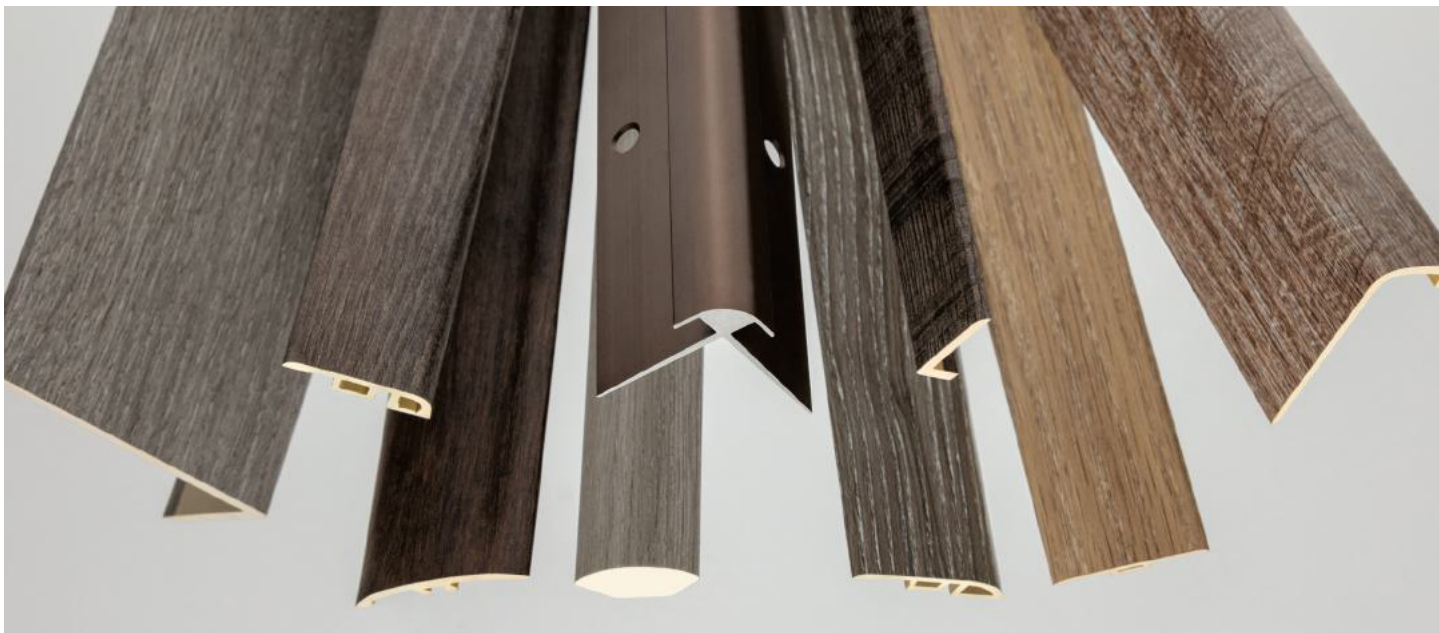




The multipurpose underlayment for vinyl planks.


The ground-breaking design and technology of these rolls provide unparalleled underlayment efficiency with the benefits of thermal insulation, antimicrobial moisture protection, and cushioning that reduces foot and leg fatigue without compromising floor-clip integrity. The thin but effective construction makes them a quick, easy, and affordable solution.

FloorSilencer Flex is an excellent choice for large jobs where budget is a priority. FloorSilencer Flex is compatible with InstaGrip and all of our Floating Floors.




Thermal Insulation

The thermally insulating fiber layer keeps rooms warm and heating costs down with an R-value 0.73.



Moisture protection

Breathable fibers allow the subfloor to disperse moisture. In addition, the moisture barrier blocks fluids and pH extremes.



Extra Comfort

Dense recycled fiber structure supports the floor, provides comfort, and will not lose integrity.



The multipurpose underlayment for vinyl planks.


These innovative fiberboards are made from a quality, eco-friendly recycled material and are a dense and durable solution to reduce sound while still being cuttable to shape. In addition, FloorSilencer Boost provides the benefits of thermal insulation, antimicrobial moisture protection, subfloor imperfection smoothing, and cushioning that reduces foot and leg fatigue without compromising floor-clip integrity.

FloorSilencer Boost is the best choice for multi-feature underlayment with affordability still in mind, and it is compatible with all of Urban Surfaces' flooring options.



Sound Reduction

The fiber layer blocks sound from traveling between levels and provides additional sound buffering for our flooring.



Moisture protection

Breathable fibers allow the subfloor to disperse moisture. In addition, the moisture barrier blocks fluids and pH extremes.



Extra Comfort

Dense recycled fiber structure supports the floor, provides comfort, and will not lose integrity.

Veneklasen Associates, Authority On Acoustics



Veneklasen Associates are responsible for not only furthering the science behind sound measurement via the IIC standard, but now they are the creators of new standards of measurement, the HIIC and LIIC.

Urban Surfaces is proud to be partnered with the pioneers of audio measurement and control, Veneklasen Associates. They have done extensive testing on all of our flooring and underlayments, giving precise measurements of how well Urban Surfaces' products reduce the travel of sound between the floors of a building.



69 HIIC



28 Δ HIIC



61 STC



Perhaps the quickest and easiest way to reduce the amount of noise transferred from one level to another is to install one of Urban Surfaces' many sound-dampening flooring options such as Foundations Floating, Studio 12 Floating, InstaGrip, and all three Sound-Tec collections. These can all noticeably reduce sound transfer by varying amounts, all of which have been measured with precision by Veneklasen Associates.

Sound Test Scores

Sound-Tec

Sound-Tec	Impact Sounds					Ambient Sounds	
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta ΔIIC	High Freq Delta ΔHIIC	STC	
	Sound Testing Wood Assembly	63	43	52	-	-	60
	Sound Testing 6" Concrete	59	70	57	24	28	51
	Sound Testing 6" Concrete with Insulation & drywall	69	69	64	-	-	61
	Sound Testing 8" Concrete	61	75	58	-	-	55

Sound-Tec with Floor Silencer Flex

Sound-Tec with Floor Silencer Flex	Impact Sounds					Ambient Sounds	
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta ΔIIC	High Freq Delta ΔHIIC	STC	
	Sound Testing Wood Assembly	71	44	52	-	-	59
	Sound Testing 6" Concrete	66	70	58	25	35	51
	Sound Testing 6" Concrete with Insulation & drywall	77	71	66	-	-	60
	Sound Testing 8" Concrete	68	77	59	-	-	55

Sound-Tec with Floor Silencer Boost

Sound-Tec with Floor Silencer Boost	Impact Sounds					Ambient Sounds	
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta ΔIIC	High Freq Delta ΔHIIC	STC	
	Sound Testing Wood Assembly	73	46	55	-	-	60
	Sound Testing 6" Concrete	72	70	54	24	41	53
	Sound Testing 6" Concrete with Insulation & drywall	78	73	66	-	-	61
	Sound Testing 8" Concrete	71	75	57	-	-	56

BREATHE EASY.

What Are You Breathing?

Research by the RFCI shows that on average a person will spend 90% of their life indoors. Whether it be in your working environment, your home, or sitting in a movie theater, you will spend a majority of your time inside. When this is realized, you may want to know how healthy the air quality is, and rightly so. A recent study done by the Environmental Protection Agency (EPA) found that indoor air was deemed two to five times more harmful than outdoor air. This is due to many harmful pollutants including radon, mold, and carbon dioxide found indoors. Healthy air contributes to better learning in schools, improved productivity in offices, and more comfortable homes. Poor indoor air quality (IAQ Indoor Air Quality) can be a factor in a variety of health problems, such as headaches, dizziness, and more serious long-term effects.

Why LVT/SPC Flooring?

LVT/SPC floors are easy to clean and maintain because they provide a impenetrable surface that doesn't absorb odors, spills, dust, or soil. They also don't retain moisture, which can lead to microorganisms such as dust mites and mold.

FloorScore and LEED Certification

Hard-surface flooring that is certified for low VOC emissions by FloorScore, such as Urban Surfaces' entire flooring selection, can contribute a point toward LEED certification. LEED (or Leadership in Energy and Environmental Design) is a global certification program for green buildings that is meant to promote the construction of buildings that are better for the planet and our health.





SPECIFICATIONS

Construction	Stone Polymer Composite (SPC)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	6mil	6mil
Edge	Square Edge	Square Edge
Overall Thickness	4.5mm - 0.177"	1.6mm - 0.063"
Nominal Size	7" x 48"	7" x 48"
Actual Size	182mm x 1220mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	Floating	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.58 (Dry)	≥0.66 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011" Residual Compression	2,000Psi .005" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes
Sound Testing	HIIC 74 ΔHIIC 32	N/A
	IIC 66 ΔIIC 24	
	STC 64 LIIC 60	
FloorScore Certified: California 01350	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point





SPECIFICATIONS

Construction	Luxury Vinyl Plank (LVP)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	8mil	20mil
Edge	Square	Beveled
Overall Thickness	2mm - 0.079"	3mm - 0.118"
Nominal Size	7" x 48"	7" x 48"
Actual Size	177.8mm x 1219.2mm	187mm x 1227mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	GlueDown	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.6 (Dry)	≥0.69 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .005" Residual Compression	2,000Psi .011" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes
FloorScore Certified: California 01350	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point





SPECIFICATIONS

Construction	Stone Polymer Composite (SPC)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	12mil	12Mil
Edge	Beveled	Square Edge
Overall Thickness	5mm - 0.196"	2mm - 0.079"
Nominal Size	7" x 48"	7" x 48"
Actual Size	182mm x 1220mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	Floating	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.69 (Dry)	≥0.66 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011" Residual Compression	2,000Psi .005" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes
Sound Testing	HIIC 71 ΔHIIC 30 IIC 64 ΔIIC 25 STC 61 LIIC 70	N/A
FloorScore Certified: California 01350	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point






SPECIFICATIONS

Construction	Stone Polymer Composite (SPC)	SPC	SPC
Wear Layer Thickness	20mil	20mil	20mil
Edge	Beveled	Painted Bevel	Beveled
Overall Thickness	6mm - 0.236"	6mm - 0.236"	6mm - 0.236"
Nominal Size	7" x 48"	9" x 60"	12" x 24"
Actual Size	182mm x 1220mm	230mm x 1524mm	305mm x 609mm
Installation	Floating	Floating	Floating
Finish	Anti-Microbial + Ceramic Bead	Anti-Microbial + Ceramic Bead	Anti-Microbial + Ceramic Bead

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.52 (Dry)	≥0.52 (Dry)	≥0.52 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .036" Residual Compression		
Smoke Density: ASTM E662	Passes	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes	Passes
Sound Testing	HIIC 69 ΔHIIC 28	HIIC 69 ΔHIIC 28	HIIC 69 ΔHIIC 28
	IIC 64 ΔIIC 24	IIC 64 ΔIIC 24	IIC 64 ΔIIC 24
	STC 61 LIIC 69	STC 61 LIIC 69	STC 61 LIIC 69
FloorScore Certified: California 01350	Passes	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point	EQ4.3 - 1 Point





SPECIFICATIONS

Construction	Luxury Vinyl Plank (LVP)	LVP	LVP
Wear Layer Thickness	20mil	28mil	28mil
Edge	Beveled	Beveled	Beveled
Overall Thickness	4.5mm - 0.177"	5mm - 0.196"	5mm - 0.196"
Nominal Size	9" x 60"	9" x 48"	36" x 36"
Actual Size	228.6mm x 1524mm	228.6mm x 1219.2mm	914.4mm x 914.4mm
Installation	Traction / Adhesive	Traction / Adhesive	Traction / Adhesive
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System	Enhanced Polyurethane System

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.69 (Dry)	≥0.8 (Dry)	≥0.8 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011"	2,000Psi .008"	2,000Psi .008"
Smoke Density: ASTM E662	Passes	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes	Passes
Sound Testing	HIIC Pending ΔHIIC Pending	HIIC Pending ΔHIIC Pending	HIIC Pending ΔHIIC Pending
	IIC Pending ΔIIC Pending	IIC 48 ΔIIC 11	IIC 48 ΔIIC 11
	STC Pending LIIC Pending	STC 61 LIIC Pending	STC 61 LIIC Pending
FloorScore Certified: California 01350	Passes	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point	EQ4.3 - 1 Point





THE TRUSTED AND RELIABLE AUTHORITY IN MULTI-FAMILY LVT FLOORING

U R B A N S U R F A C E S
800.492.8722
Sales@urbansurfaces.com
Designed and Developed in California

