

PRODUCT LINEUP CATALOG

URBAN
SURFACES





ALLOW US TO INTRODUCE OURSELVES

Urban Surfaces provides the multi-unit and builder markets with beautiful, innovative, and high-quality flooring products. We work with you to select materials, coordinate schedules, and do whatever it takes to deliver your order at just the right time.

With Urban Surfaces, you are not just another customer. We build our business around yours to keep your flooring selection in stock and ready to ship for the duration of your project.

There's a great reason some of the biggest national property management firms trust Urban Surfaces. We value partnership above all else, and we promise to reliably supply you with luxury vinyl flooring for projects of any size.

**The most reliable authority
in LVP and a trusted partner
to builder and multi-unit
spaces across the nation.**



6
MIL

FOUNDATIONS
6MIL LVP GLUEDOWN FLOOR

BUILD UPON A STRONG FOUNDATION

**6MIL SCRATCHGUARD
WEAR LAYER**
Effective Wear Protection

**NATURAL WOOD
TEXTURE**
Ultra-Realistic Look
Focused Color Selection

**ENHANCED
POLYURETHANE SYSTEM**
Highly Stain Resistant



SCAN FOR
MORE INFO



Newport Landing 1104



PURE QUALITY FOR ANY BUDGET

Foundations™ is a carefully crafted collection of high-end colors and patterns that will ensure you find the perfect fit for your design goals.

The Foundations™ collection features a wide variety of moldings and stair treads to give your projects a cohesive and polished style.

Core	Pure Vinyl
Plank Size	7" x 48"
Thickness	1.6mm
Wear Layer	6mil ScratchGuard
Edge Profile	Square Edge
Installation	GlueDown
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

03
THREE
YEARS

LIGHT COMMERCIAL

10
TEN
YEARS

RESIDENTIAL



**100%
WATERPROOF**



**PET
FRIENDLY**



**PREMIUM
VISUALS**

Construction

Enhanced Polyurethane System

6mil ScratchGuard Wear Layer

Natural Wood Texture

1.6mm Virgin Vinyl



Perfectly Formulated For A Durable
Installation And Easy Repairs



Mission Bay
1101



Carvins Cove
1102



Sonora Heights
1103



Newport Landing
1104



Hansen Creek
1105



Rochester Springs
1106



Balboa Trails
1107



Longview Point
1108



Carvins Cove 1102

8
MIL

MAIN|STREET

8MIL LVP GLUEDOWN FLOORING

DELIVERING LASTING VALUE TO THE HOME

8MIL SCRATCHGUARD WEAR LAYER

Effective Wear Protection

NATURAL WOOD TEXTURE

Ultra-Realistic Look
Focused Color Selection



SCAN FOR
MORE INFO



Marquette 8061



NATURAL ELEGANCE FOR ANY RESIDENCE

Main Street™ features a modern and stylish high-definition film layer for a truly natural wood look. When it comes to affordable GlueDown LVP, Main Street™ is a cut above the competition. With a 100% waterproof construction and the perfect balance of performance plus design at compelling values, Main Street™ is the preferred choice for the multi-family and single-family markets.

Core	Pure Vinyl
Plank Size	7" x 48"
Thickness	2mm
Wear Layer	8mil ScratchGuard
Edge Profile	Square
Installation	GlueDown
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

05
FIVE
YEARS

LIGHT COMMERCIAL

15
FIFTEEN
YEARS

RESIDENTIAL



**100%
WATERPROOF**



**PET
FRIENDLY**



**EASY
REPAIR**

Construction

Enhanced Polyurethane System

8mil ScratchGuard Wear Layer

Natural Wood Texture

2mm Virgin Vinyl



Perfectly Formulated For A Durable
Installation And Easy Repairs



Twilight 8051



Briscoe
8123



Hudson
8071



Aspen
8070



Sierra
8060



Marquette
8061



Midland Grey
8050



Twilight
8051



Barn Owl
8122



Ash
8307



Presidio
8306

12
MIL



FINISH PROJECTS ON TIME AND UNDER BUDGET

12MIL SCRATCHGUARD WEAR LAYER

Extra Wear Protection

NATURAL WOOD TEXTURE

Ultra-Realistic Look
Focused Color Selection

ENHANCED POLYURETHANE SYSTEM

Highly Stain Resistant



SCAN FOR
MORE INFO



Berlin Terrace Floating 2914 | GlueDown 2114



FLOORING DESIGNED FOR MULTI-UNIT PROPERTIES

Warranties



The Studio 12™ flooring collection is designed specifically with value in mind for multi-family projects. Studio 12™'s crossover colors enable you to put GlueDown flooring on the bottom floor and Floating Floor on the upper levels, completing the whole project seamlessly while saving money.

Floating Floor

Core	High-Density Solid Core
Plank Size	7" x 48"
Thickness	5mm
Wear Layer	12mil ScratchGuard
Edge Profile	Beveled Edge
Installation	Floating
LEED Scorecard	EQ 4.3 - 1 Point


GlueDown

Core	Pure Vinyl
Plank Size	7" x 48"
Thickness	2mm
Wear Layer	12mil ScratchGuard
Edge Profile	Square Edge
Installation	GlueDown
LEED Scorecard	EQ 4.3 - 1 Point

Construction

Floating Floor Layers

- Enhanced Polyurethane System
- 12mil ScratchGuard Wear Layer
- Natural Wood Texture
- 4mm High-Density Solid Core
- 1mm Sound-Reducing Underlayment

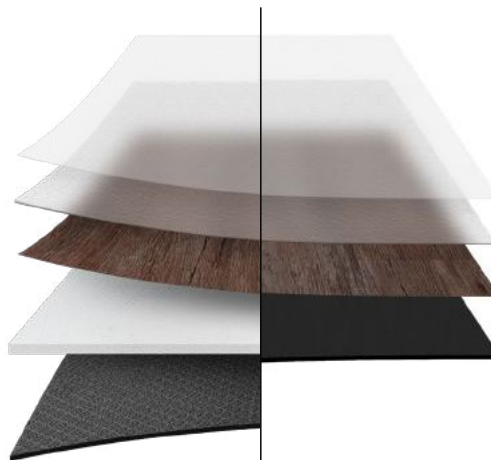

GlueDown Layers

- Enhanced Polyurethane System
- 12mil ScratchGuard Wear Layer
- Natural Wood Texture
- 2mm Virgin Vinyl



Pearl
Floating 2901
GlueDown 2101



Bristol Harbor
Floating 2907
GlueDown 2107



Whispering Pines
Floating 2908
GlueDown 2108



Bedford Creek
Floating 2910
GlueDown 2110



Sandpiper Spring
Floating 2909
GlueDown 2109



Arrowhead
Floating 2903
GlueDown 2103



Cobble Hill
Floating 2911
GlueDown 2111



Yosemite
Floating 2999
GlueDown 2199



Willow Run
Floating 2912
GlueDown 2112



Berlin Terrace
Floating 2914
GlueDown 2114



Chestnut
Floating 2906
GlueDown 2106



Hidden Acres
Floating 2913
GlueDown 2113



Whispering Pines Floating 2908 | GlueDown 2108

20
MIL

 **SOHO SQUARE**
20MIL LVP GLUEDOWN FLOORING

**EXCEPTIONAL
PERFORMANCE
FOR COMMERCIAL
ENVIRONMENTS**

**20MIL SCRATCHGUARD
WEAR LAYER**
Commercial Wear Protection

**NATURAL WOOD
TEXTURE**
Ultra-Realistic Look
Focused Color Selection

**ENHANCED
POLYURETHANE SYSTEM**
Highly Stain Resistant



SCAN FOR
MORE INFO



Courtland Alley 7528



AT THE INTERSECTION OF ART AND INDUSTRY

SoHo Square™ offers a modern-day solution for commercial applications by providing the natural look of wood. Both stylish and highly resistant to walk-through, it makes projects that were once impossible into a reality.

Core	Pure Vinyl
Plank Size	7" x 48"
Thickness	3mm
Wear Layer	20mil ScratchGuard
Edge Profile	Square Edge
Installation	GlueDown
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

20
TWENTY
YEARS

LIGHT COMMERCIAL

15
FIFTEEN
YEARS

HEAVY COMMERCIAL

LIFE
TIME

RESIDENTIAL



100%
WATERPROOF



HIGH
TRAFFIC



EASY
REPAIR

Construction

Enhanced Polyurethane System

20mil ScratchGuard Wear Layer

Natural Wood Texture

3mm Virgin Vinyl



 **EVERLAST**
3020 | HARD SET ADHESIVE

Ultra-strong Bond For Long
Lasting Commercial Flooring



Boardwalk 7503



Canal Street
7501



Sixth Avenue
7527



Charlton Plaza
7526



Sullivan Street
7502



Wooster Street
7505



Dakota Way
7509



Sedona Bridge
7508



Crosby Street
7507



Boardwalk
7503



West Broadway
7524



Waverly Place
7504



Courtland Alley
7528

20
MIL

SOUND-TEC
20MIL SPC FLOORING

**FOREVER
WATERPROOF &
SOUND REDUCING**

**20MIL SCRATCHGUARD
WEAR LAYER**
Commercial Wear Protection

**CERAMIC BEAD
SCRATCH ARMOR**
Extra Protection
Against Scratches

**ENHANCED
POLYURETHANE SYSTEM**
Highly Stain Resistant



SCAN FOR
MORE INFO



Sedona Bridge 9508



UNPARALLELED NOISE REDUCTION

Sound-Tec™, the original sound-reducing floor, continues to outpace the competition with its impressive quality. Sound-Tec™ floors include antimicrobial coatings above and below to protect against harmful mold and mildew.

Core	4.5mm High-Density Solid Core
Plank Size	7" x 48"
Thickness	6mm
Wear Layer	20mil ScratchGuard
Edge Profile	Beveled Edge
Installation	Floating
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

20
TWENTY
YEARS

LIGHT COMMERCIAL

15
FIFTEEN
YEARS

HEAVY COMMERCIAL

LIFE
TIME

RESIDENTIAL



**100%
WATERPROOF**



**PET
FRIENDLY**



**ANTI
MICROBIAL**

Construction

Antimicrobial Surface Coating

Ceramic Bead Scratch Armor


20mil ScratchGuard Wear Layer

Natural Wood Texture

4.5mm High-Density Solid Core

1.5mm Sound-Reducing Underlayment

Antimicrobial Pad Protection

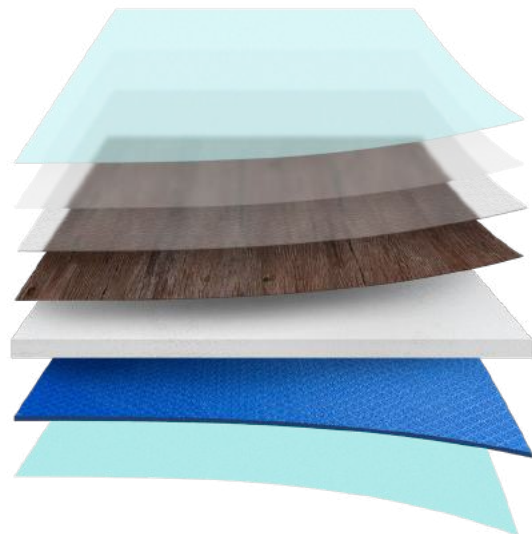

Proudly Partnered With
Veneklasen Associates

The First and Still the Best Authority
on Acoustics.



Sixth Avenue
9527



Pembroke
9511



Caspian Heights
9520



Charlton Plaza
9526



Navajo
9563



Astoria
9521



Yosemite
9599



Boardwalk
9503



Dakota Way
9509



Cheyenne
9553



Sedona Bridge
9508



Avondale
9529



Monterey
9510



Kodiak
9537



West Broadway
9524



Cambridge
9523



Midland Grey
9525



Twilight
9505



Stormy Sky
9557



La Jolla
9516



Alamo
9538



Courtland Alley
9528



Midnight Grey
9573



Fairbanks
9534

20
MIL

SOUND-TEC PLUS
20MIL SPC FLOORING

**NATURALLY
STUNNING
FLOORS FOR THE
MODERN HOME**

**20MIL SCRATCHGUARD
WEAR LAYER**
Commercial Wear Protection

**CERAMIC BEAD
SCRATCH ARMOR**
Extra Protection
Against Scratches

**ENHANCED
POLYURETHANE SYSTEM**
Highly Stain Resistant



SCAN FOR
MORE INFO



Mesa Verde 9714



MORE BEAUTY PER PLANK

The larger format of Sound-Tec Plus™ has captured a lot of attention with naturally pristine visuals inspired by the world's most breathtaking destinations. Take a moment to enjoy the luxurious options in this expansive product line containing authentic wood styles ranging from rustic to modern.

Core	4.5mm High-Density Solid Core
Plank Size	9" x 60"
Thickness	6mm
Wear Layer	20mil ScratchGuard
Edge Profile	Painted Beveled Edge
Installation	Floating
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

20
TWENTY
YEARS

LIGHT COMMERCIAL

15
FIFTEEN
YEARS

HEAVY COMMERCIAL

LIFE
TIME

RESIDENTIAL



**100%
WATERPROOF**



**PET
FRIENDLY**



**ANTI
MICROBIAL**

Construction

Antimicrobial Surface Coating

Ceramic Bead Scratch Armor


20mil ScratchGuard Wear Layer

Natural Wood Texture

4.5mm High-Density Solid Core

1.5mm Sound-Reducing Underlayment

Antimicrobial Pad Protection

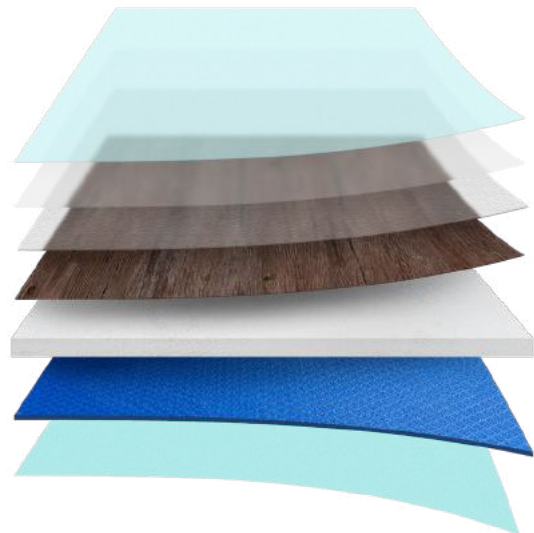

Proudly Partnered With
Veneklasen Associates

The First and Still the Best Authority
on Acoustics.





Biscayne Bay
9711



Mesa Verde
9714



Joshua Tree
9713



Mount Rainier
9707



Pinnacle Grove
9715



Mount Olympia
9712



Yellowstone
9706



Acadia
9704

20
MIL

SOUND-TECTILE
20MIL SPC FLOORING

**ROCK SOLID,
LONG LASTING
STONE LOOKS**

**20MIL SCRATCHGUARD
WEAR LAYER**
Commercial Wear Protection

**REALISTIC
STONE LOOK**
Ultra-Realistic Look
Focused Color Selection

**ENHANCED
POLYURETHANE SYSTEM**
Highly Stain Resistant



SCAN FOR
MORE INFO



Obsidian 9603



ROCK-SOLID FLOORS WITH UNPARALLELED NOISE REDUCTION

With its angle-drop installation, Sound-Tec Tile™ is a step forward in every way featuring stunning beauty, sound reduction, and durability. Gone is the hassle of ceramic flooring. Tile has never been this quick and easy.

Core	4.5mm High-Density Solid Core
Plank Size	12" x 24"
Thickness	6mm
Wear Layer	20mil ScratchGuard
Edge Profile	Beveled Edge
Installation	Floating
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

20
TWENTY
YEARS

LIGHT COMMERCIAL

15
FIFTEEN
YEARS

HEAVY COMMERCIAL

LIFE
TIME

RESIDENTIAL



100%
WATERPROOF



PET
FRIENDLY



ANTI
MICROBIAL

Construction

Antimicrobial Surface Coating

Ceramic Bead Scratch Armor


20mil ScratchGuard Wear Layer

Natural Stone Texture

4.5mm High-Density Solid Core

1.5mm Sound-Reducing Underlayment

Antimicrobial Pad Protection

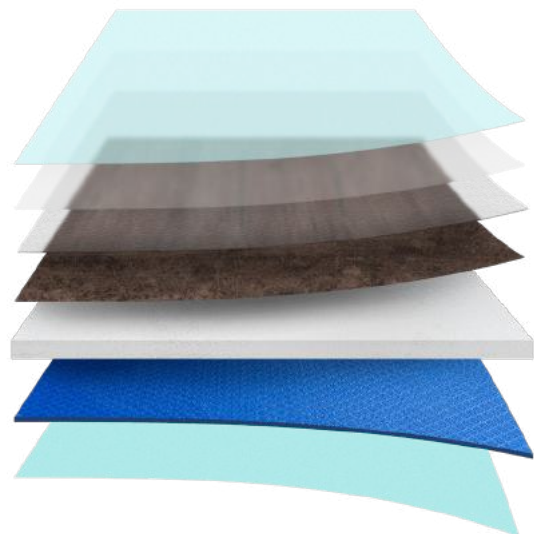


Proudly Partnered With
Veneklasen Associates

The First and Still the Best Authority
on Acoustics.



Electra
9609

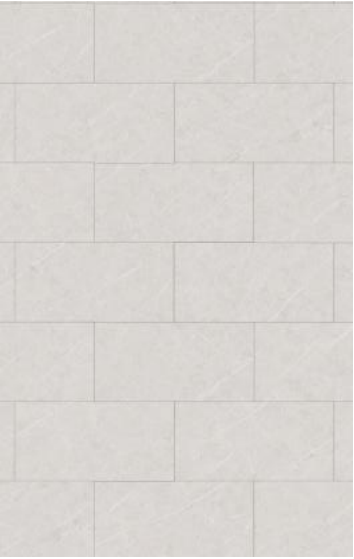

Vega
9610



Astella
9608



Solstice
9606



Nova
9607



Luna
9605



Meteor
9604



Obsidian
9603



Meteor 9604

20
MIL

INSTAGRIP 20
20MIL LOOSELAY FLOORING

**EXPERTLY
ENGINEERED
FOR UNRIVALED
PERFORMANCE**

**20MIL SCRATCHGUARD
WEAR LAYER**

Excellent Wear Protection
Deflects Damage

INSTALL OPTIONS

Traction Subfloor Coating
Full-Spread Adhesive

EXACT-MATCH STAIR NOSE

Available for Every Design



SCAN FOR
MORE INFO



Asbury 1201



FIBERGLASS REINFORCED

InstaGrip 20™ is our streamlined LooseLay vinyl flooring with a 20mil ScratchGuard wear layer and a 4.5mm pure vinyl core. Whether it is a residential or commercial space, the FiberMax fiberglass reinforcement and Grip-Tec backing ensure a steadfast installation that lasts.

Core	4.5mm Virgin Vinyl
Plank Size	9" x 60"
Thickness	4.5mm
Wear Layer	20mil ScratchGuard
Edge Profile	Beveled Edge
Installation	LooseLay
LEED Scorecard	EQ 4.3 - 1 Point

Warranties

20
TWENTY
YEARS

LIGHT COMMERCIAL

15
FIFTEEN
YEARS

HEAVY COMMERCIAL

LIFE
TIME

RESIDENTIAL



100%
WATERPROOF



PET
FRIENDLY



FIBERMAX
REINFORCED

Construction

Enhanced Polyurethane System

20mil ScratchGuard Wear Layer

Natural Wood Texture

4.5mm Virgin Vinyl

Fiberglass Stabilization Layer

Grip-Tec Backing



Meet The Revolutionary
Alternative To Glue



Lighthouse
1206



Cape Cod
1202



Asbury
1201



Sandbridge
1203



Yosemite
1299



Scarborough
1204



Sagamore Hill
1205



West Broadway
1224



Scarborough 1204

28
MIL

INSTAGRIP 28

28MIL LOOSELAY FLOORING

**LESS WORK,
LESS TIME,
MORE PEACE
OF MIND**

28MIL SCRATCHGUARD WEAR LAYER

Excellent Wear Protection
Deflects Damage

INSTALL OPTIONS

Traction Subfloor Coating
Full-Spread Adhesive

EXACT-MATCH STAIR NOSE

Available for Every Design



SCAN FOR
MORE INFO



Pismo 1003



LOOSELAY PERFECTED BEYOND MEASURE

InstaGrip 28™ LooseLay vinyl flooring is quick to install and features heavy-duty, commercial-grade FiberMax durability. The 28mil wear layer stands up to heavy foot traffic and rolling loads while the Grip-Tec backing secures the planks to the floor.

Core	5mm Virgin Vinyl
Plank Size	9" x 48"
Thickness	5mm
Wear Layer	28mil ScratchGuard
Edge Profile	Beveled Edge
Installation	LooseLay
LEED Scorecard	EQ 4.3 - 1 Point

Warranties



100% WATERPROOF



PET FRIENDLY



FIBERMAX REINFORCED

Construction

Enhanced Polyurethane System

28mil ScratchGuard Wear Layer

Natural Wood Texture

5mm Virgin Vinyl

Fiberglass Stabilization Layer

Grip-Tec Backing



Meet The Revolutionary Alternative To Glue





Laguna
1007



Hollister
1005



Pismo
1003



Avalon
1002



Doheny
1008



Coronado
1004



Moonstone
1001



Woods Cove
1006



Avalon 1002

28
MIL

INSTAGRIP 28 TILE
28MIL LOOSELAY FLOORING

**INDUSTRIAL
BEAUTY
IN GRAND
PROPORTIONS**

LARGE 36" X 36" TILE FORMAT

Impressive Flooring Dimensions
for Premium Elegance

STONE TILE AESTHETIC


Sophisticated Industrial Look
Ultra-Realistic Style
Tactile Stone Feel

EXACT-MATCH STAIR NOSE


Available for Every Design



SCAN FOR
MORE INFO

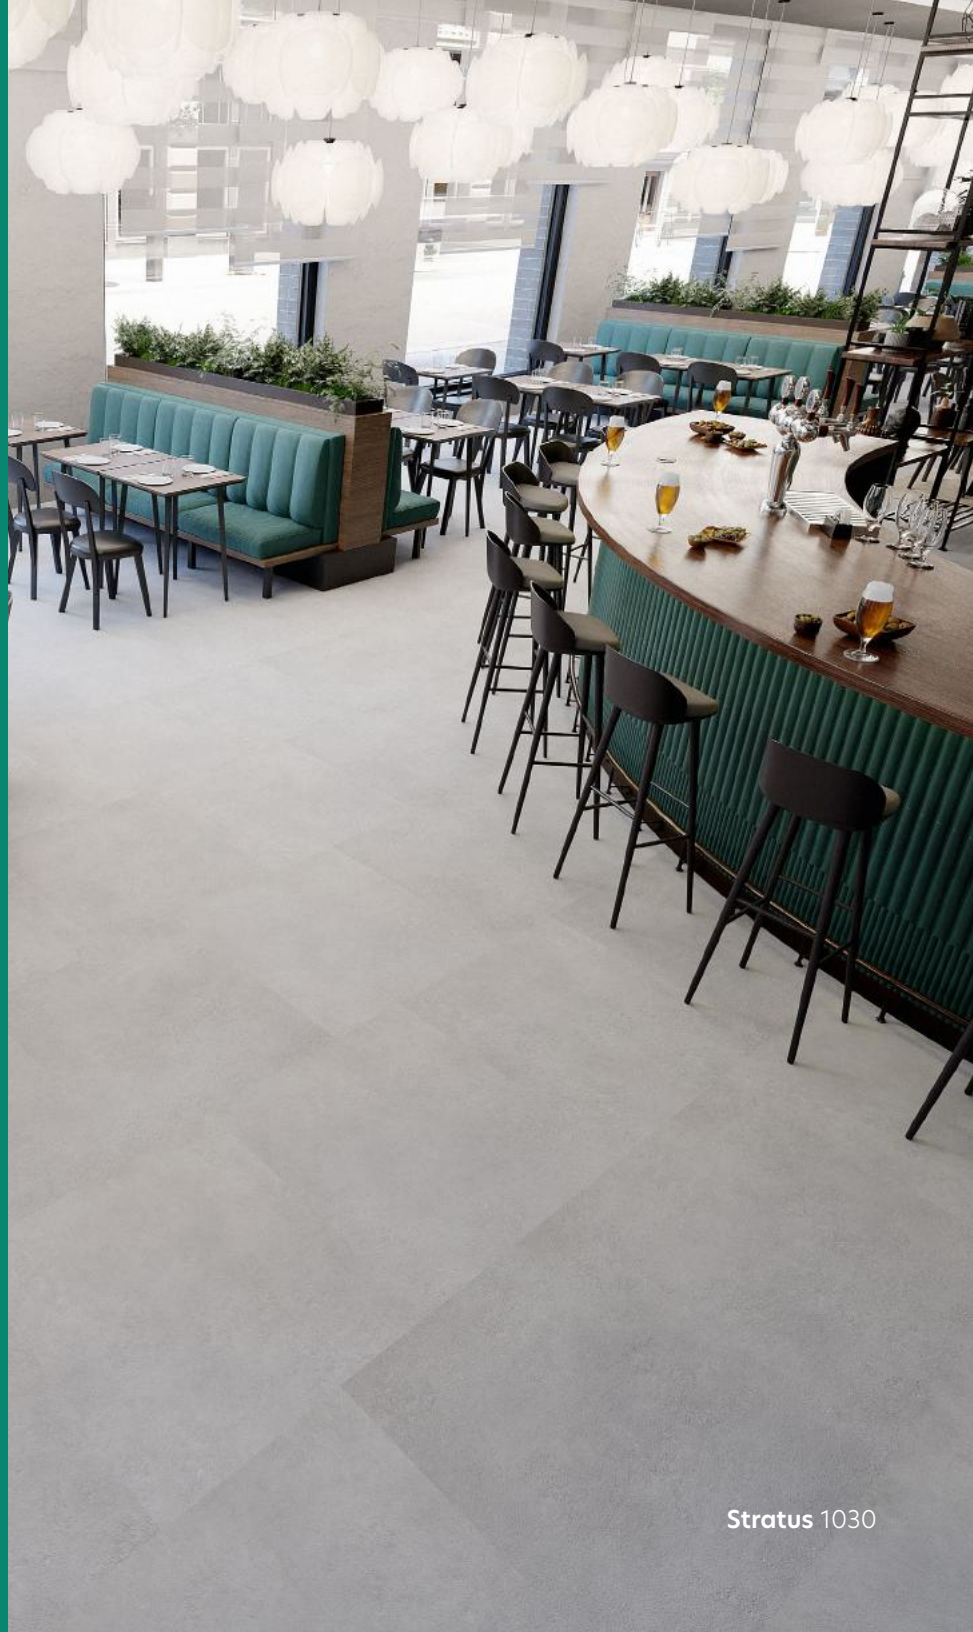

Stratus 1030



A STUNNING 36" x 36" STATEMENT

InstaGrip 28 Tile™ is LooseLay vinyl flooring with an industrial and premium 36" x 36" aesthetic. This FiberMax-reinforced, Grip-Tec-backed tile features highly durable, 5mm vinyl construction with a concrete appearance, smooth topography, and large dimensions.

Core	5mm Virgin Vinyl
Plank Size	36" x 36"
Thickness	5mm
Wear Layer	28mil ScratchGuard
Edge Profile	Beveled Edge
Installation	LooseLay
LEED Scorecard	EQ 4.3 - 1 Point

Warranties



100%
WATERPROOF



36" x 36"
TILES



FIBERMAX
REINFORCED

Construction

Enhanced Polyurethane System

28mil ScratchGuard Wear Layer

Natural Stone Texture

5mm Virgin Vinyl

Fiberglass Stabilization Layer

Grip-Tec Backing



Meet The Revolutionary
Alternative To Glue



Stratus
1030



Cloudburst
1031




Aurora
1032



Landfall
1033



Thunderhead
1034

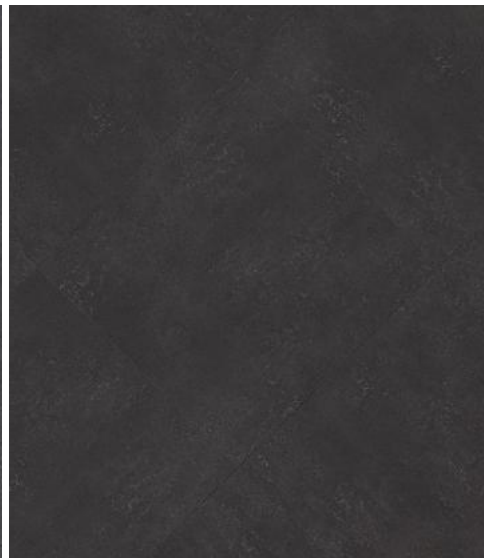

Eclipse
1035



Aurora 1032



INSTALLATION PERFECTION EVERY TIME WITH URBAN ESSENTIALS

ADHESIVE PRODUCTS



Bonds subfloor to GlueDown LVP for light-traffic conditions. Make sure to use the proper trowel based on porosity and primer usage.

Coverage:
150-260 sqft per gallon



Bonds subfloor to GlueDown LVP for light-traffic and commercial applications. Make sure to use the proper trowel based on porosity and primer usage.

Coverage:
150-260 sqft per gallon



Does it all in one step. Commercial-grade adhesive for GlueDown LVP, primer, and unlimited moisture protection. No moisture testing required.

Coverage:
180-250 sqft per gallon



Adhesive for application of LVP to vertical surfaces. Create a beautifully unique look for walls by using 2mm or thinner flooring.

Coverage:
250-300 sqft per gallon



Ensures that moldings stay put. High-strength, flexibly bonded, and resistant to high alkalinity. Comes in tube for use with a caulking gun.



SCAN FOR ALL
URBAN ESSENTIALS
PRODUCTS

SUBFLOOR-COATING PRODUCTS



TRACTION 3545 | SUBFLOOR GRIP COATING

Fast and easy LooseLay installation. Not an adhesive. Provides horizontal grip, priming, and up to 90% moisture protection. Easily replace planks by hand if repairs are ever needed.

Coverage:
1 Coat: 350 sqft per gallon
2 Coats: 200 sqft per gallon

TRILOGY 3525 | MULTIPURPOSE PRIMER

Primes for an effective adhesive bond and protects against alkali attack. Provides encapsulation or up to 95% moisture protection (not simultaneously).

Coverage:
1 Coat: 350 sqft per gallon
2 Coats: 200 sqft per gallon



INFUSE 3515 | ENCAPSULATOR & PRIMER

Encapsulates adhesive residue, including cutback, and primes for an effective bond to subfloor. Protects against alkali attack. Apply after any needed moisture protection.

Coverage:
250 sqft per gallon



ADVANTAGE 3505 | SUBFLOOR PRIMER

Primes for an effective adhesive bond to subfloor. Protects against alkali attack. Apply after appropriate moisture protection.

Coverage:
300-450 sqft per gallon




INFINITI 3535 | MOISTURE PROTECTION

Provides 100% moisture protection, no testing required. Before applying adhesive, use Infuse™ Encapsulator & primer.

Coverage:
90-120 sqft per gallon






FloorSilencer Boost™ - 4' x 6' Panel, 6mm (1/4") Thickness

Provides the benefits of sound reduction, thermal insulation, antimicrobial moisture protection, subfloor-imperfection smoothing, and cushioning that reduces foot and leg fatigue without compromising floor-clip integrity. Innovative fiberboards, made from quality, eco-friendly recycled materials. Dense and durable while still being cuttable to shape.

Compatibility

Floating Floor ✓ 4mm+

Boost



FloorSilencer Flex™ - 6' x 60' Roll, 1.4mm Thickness

The ground-breaking design and technology of these rolls provide unparalleled underlayment efficiency with the benefits of sound reduction, thermal insulation, antimicrobial moisture protection, and cushioning that reduces foot and leg fatigue without compromising floor-clip integrity. The thin but effective construction makes FloorSilencer Flex™ a quick, easy, and affordable solution.

Compatibility

Floating Floor ✓ 4mm+

Flex



FloorSilencer Pro™ - 3' x 33.4' Roll, 1.25mm Thickness

These underlayment rolls are remarkably easy and versatile, featuring compatibility with every single one of our flooring types. FloorSilencer Pro™ adeptly provides noise reduction, moisture protection, antimicrobial defense, and thermal insulation. It is the ideal underlayment for projects that use very thin flooring or a variety of flooring types.

Compatibility

Floating Floor ✓ 4mm+

GlueDown ✓ 1.6mm+

Pro



**THE FIRST AND STILL
THE BEST AUTHORITY
ON ACOUSTICS**

Veneklasen Associates, Keeping Noise Under Control

Having earned degrees in physics and mathematics from UCLA, Paul S. Veneklasen founded Veneklasen Associates in 1947 to put his acoustical physics knowledge to work. Veneklasen became an important consultant to government agencies such as the US Air Force, contributing to improved helmet designs and jet-noise suppression. He also contributed to the private sector, providing innovative solutions for acoustic testing that are still in use today.

Veneklasen Associates was the world's first acoustical consulting firm ever founded. Since the beginning, they have treated sound as what it is: a science to be studied inside and out. Understanding the physics of audio has been crucial to them from the start, leading to vital advancements in the measurement, control, and use of sound worldwide.

Badge of Honor

We proudly feature the Veneklasen Associates badge on our packaging. Regardless of which of our floorings you choose, when you see the Veneklasen Associates badge, you can rest assured that you're getting an accurate sound rating.

You don't have to be an acoustical physicist to know how important a quiet environment can be for both work and home. We did the hard part so you can order confidently, knowing you're getting not just a great flooring but a quiet one.

Exact-Match Moldings

Our moldings provide clean and beautiful transitions with exact matches for every one of our Floating Floor designs. These highly wear-resistant and 100% waterproof moldings are robustly built to blend.



End Cap
94"

End Caps are used in a number of different applications, especially when ending runs against vertical surfaces.



2-in-1 Slim Trim (SLT)
94"

Works as a Reducer, but also serves as a T-Molding when connecting even surfaces.



Low Profile End Cap
94"

Low Profile is perfect for areas where no base molding can be installed (such as bathtubs).



T-Molding
94"

Bridges two surfaces of equal height. The low-profile look makes a beautiful transition.



Quarter Round
96"

So quick and easy that baseboards don't even need to be removed in order to install.



Reducer
94"

Where flooring of different heights meet, the Reducer adds a gentle slope between.



Premium Stair Finishing

Urban Surfaces' stair-finishing products provide stylish and durable stair solutions with exact-match designs.



InstaGrip Stair Nose
94"

This broad and beautiful stair nose installs flush and gives your install a stylish appearance.



White SPC Stair Riser
7 1/4" x 48"

Pairs perfectly with our stair treads. White SPC with a 3mil wear layer and UV protection.



Square Edge Stair Nose
94"

For that modern Square Edge look, with a more classical installation and approach.



Square Edge Stair Tread
11 3/4" x 51 5/8"

Installs quickly and provides a perfect finish every time. Put an end to on-site retrofitting.



Metal Stair Nose
96"

When floating floors require a more contemporary approach.




Stair Nose
94"


This classic nosing can be installed flush or overlapping, depending on the desired finish.



Molding Type		 Sound-Tec	 Sound-Tec Plus	 Sound-Tec Tile	 Studio 12	 Foundations	 InstaGrip
	Slim Trim (SLT)	✓	✓	✓	✓	✓	
	Low Profile End Cap	✓	✓	✓			
	Reducer	✓	✓	✓	✓	✓	
	End Cap	✓	✓	✓	✓	✓	
	T-Molding	✓	✓	✓	✓	✓	
	Stair Nose	✓	✓		✓	✓	
	Quarter Round				✓	✓	
	Metal Stair Nose	✓	✓	✓			
	InstaGrip Stair Nose						✓
	Square Edge Stair Tread	✓	✓		✓	✓	
	Square Edge Stair Nose	✓	✓		✓	✓	

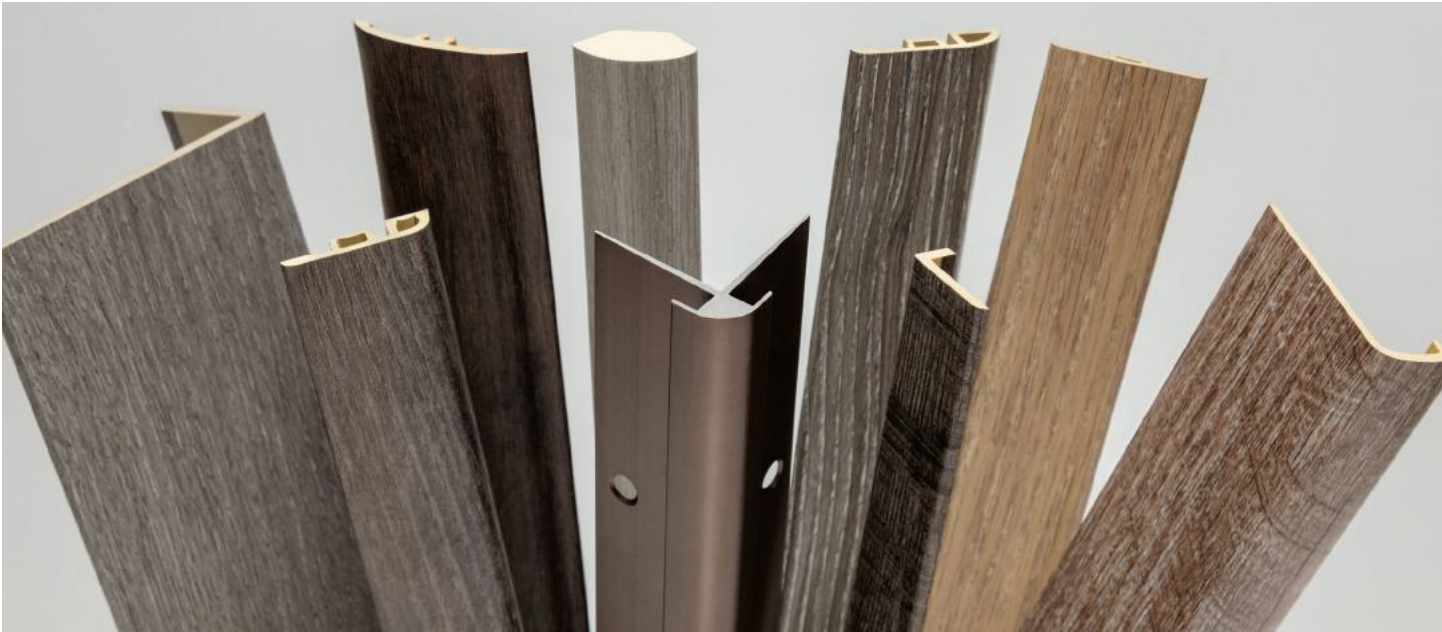

Where beauty meets function.

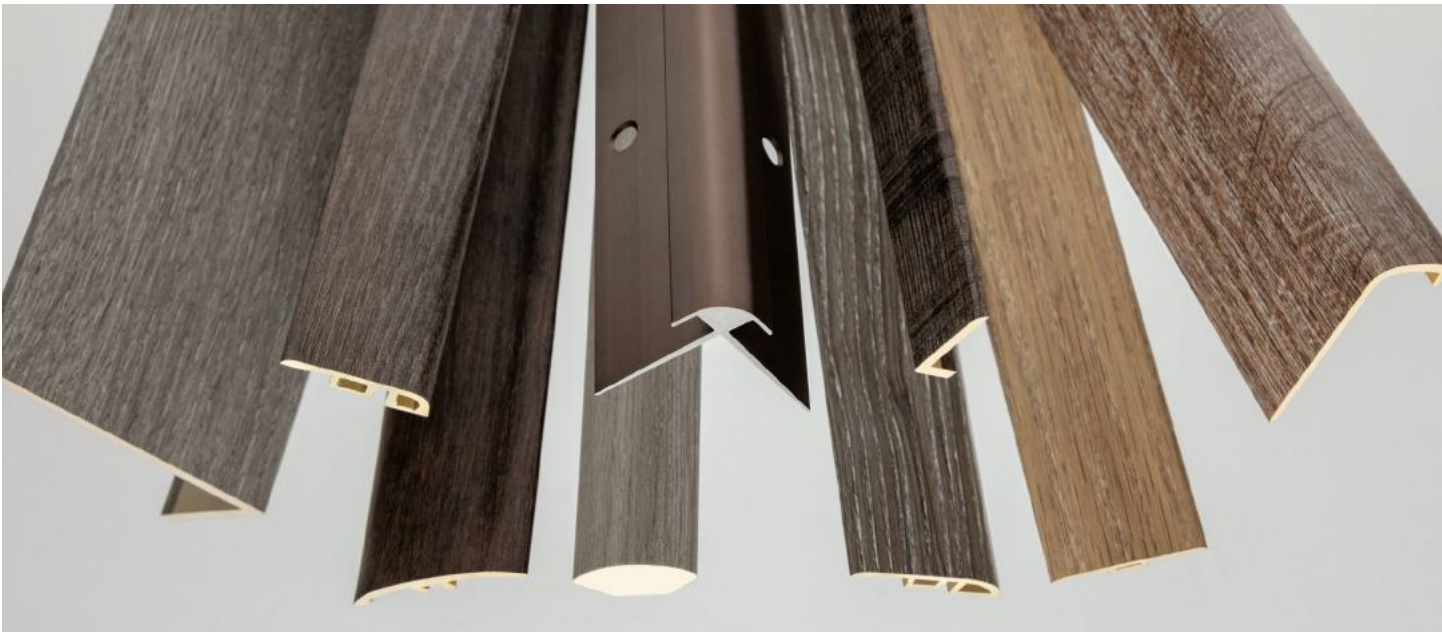



WHY HARD SURFACE FLOORING?

Hard-surface floors are easy to clean and maintain because they provide a one-dimensional surface that doesn't absorb odors, spills, dust, or soil. They also don't retain moisture, which can lead to the growth of microorganisms, such as dust mites and mold.

What Are You Breathing?

Research by the RFCI shows that, on average, a person will spend 90% of their life indoors. Whether it be in your working environment, your home, or sitting in a movie theater, you will spend a majority of your time inside. When this is realized, you may want to know how healthy the air quality is, and rightly so. A recent study done by the Environmental Protection Agency (EPA) found that indoor air was deemed two to five times more harmful than outdoor air. This is due to many harmful pollutants that may be found indoors, including radon, mold, and carbon dioxide.

Healthy air contributes to better learning in schools, improved productivity in offices, and more comfortable homes. Poor indoor air quality (IAQ) can be a factor in a variety of health problems, such as headaches, dizziness, and more serious long-term effects.



WHY FLOORSCORE?



When it comes to indoor air quality, a primary concern is the emission level of specific volatile organic compounds (VOCs).

Hundreds of resilient flooring materials and their adhesives bear the FloorScore® seal. This seal tells you that the products have been independently certified by SCS to comply with the volatile organic compound emissions criteria of the California Section 01350 standard. Any product that has met these stringent standards is a product that will contribute to good IAQ.


FloorScore Requirements

To earn the FloorScore® seal, a flooring product must satisfy the requirements of the SCS-EC-10.2-2007 Environmental Certification Program – Indoor Air Quality Performance.

Which Includes:

Testing demonstrating compliance with emission concentrations for listed VOCs under California Section 01350

- Manufacturing facility on-site audits and yearly surveillance audits
- Annual product re-testing
- Product record keeping
- A documented quality control plan

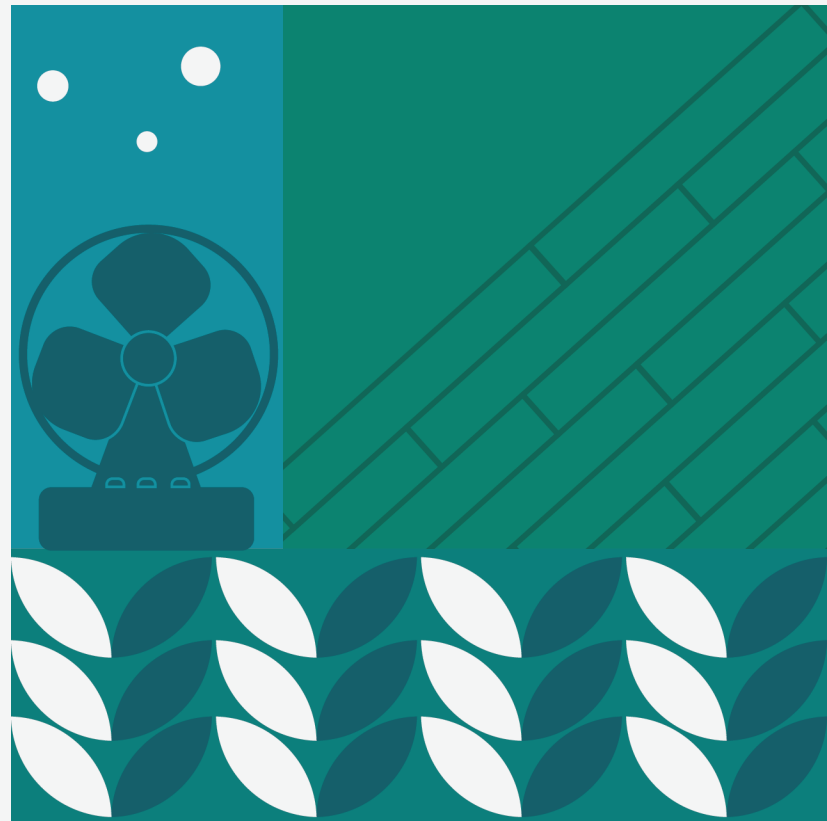

Sound Test Scores

Sound-Tec	Impact Sounds					Ambient Sounds
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta Δ IIC	High Freq Delta Δ HIIC	STC
Sound Testing Wood Assembly	63	43	52	-	-	60
Sound Testing 6" Concrete	59	70	57	24	28	51
Sound Testing 6" Concrete with Insulation & Drywall	69	69	64	-	-	61
Sound Testing 8" Concrete	61	75	58	-	-	55

Sound-Tec with Floor Silencer Flex	Impact Sounds					Ambient Sounds
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta Δ IIC	High Freq Delta Δ HIIC	STC
Sound Testing Wood Assembly	71	44	52	-	-	59
Sound Testing 6" Concrete	66	70	58	25	35	51
Sound Testing 6" Concrete with Insulation & Drywall	77	71	66	-	-	60
Sound Testing 8" Concrete	68	77	59	-	-	55

Sound-Tec with Floor Silencer Boost	Impact Sounds					Ambient Sounds
	High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta Δ IIC	High Freq Delta Δ HIIC	STC
Sound Testing Wood Assembly	73	46	55	-	-	60
Sound Testing 6" Concrete	72	70	54	24	41	53
Sound Testing 6" Concrete with Insulation & Drywall	78	73	66	-	-	61
Sound Testing 8" Concrete	71	75	57	-	-	56

SPECIFICATIONS

Construction	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	6mil
Edge	Square Edge
Overall Thickness	1.6mm - 0.063"
Nominal Size	7" x 48"
Actual Size	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System
Installation	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.66 (Dry)
Radiant Flux / ASTM E648	Class 1
Static Load / ASTM F970	2,000Psi .005" Residual Compression
Smoke Density: ASTM E662	Passes
Light Resistance: ASTM F1515	Passes
Heat Resistance / ASTM F1514	Passes
Chemical Resistance / ASTM F925	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals: ASTM F963	Passes
Formaldehyde: ASTM D6007	Passes

Sound Testing N/A

FloorScore Certified: California 01350	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point



DOWNLOAD
SPEC SHEET

SPECIFICATIONS

Construction	Luxury Vinyl Plank (LVP)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	8mil	20mil
Edge	Square Edge	Square Edge
Overall Thickness	2mm - 0.079"	3mm - 0.118"
Nominal Size	7" x 48"	7" x 48"
Actual Size	177.8mm x 1219.2mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	GlueDown	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.6 (Dry)	≥0.69 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .005" Residual Compression	2,000Psi .011" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes
FloorScore Certified: California 01350	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point



DOWNLOAD
SPEC SHEET



DOWNLOAD
SPEC SHEET



SPECIFICATIONS

Construction	Stone Polymer Composite (SPC)	Luxury Vinyl Plank (LVP)
Wear Layer Thickness	12mil	12mil
Edge	Beveled	Square Edge
Overall Thickness	5mm - 0.196"	2mm - 0.079"
Nominal Size	7" x 48"	7" x 48"
Actual Size	182mm x 1220mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Installation	Floating	GlueDown

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.69 (Dry)	≥0.66 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011" Residual Compression	2,000Psi .005" Residual Compression
Smoke Density: ASTM E662	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes

Sound Testing	HIIC 71 ΔHIIC 30 IIC 64 ΔIIC 25 STC 61 LIIC 75	N/A
---------------	--	-----

FloorScore Certified: California 01350	Passes	Passes
--	--------	--------

Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point
---	-----------------	-----------------



DOWNLOAD
SPEC SHEET



DOWNLOAD
SPEC SHEET



SPECIFICATIONS

Construction	Stone Polymer Composite (SPC)	SPC	SPC
Wear Layer Thickness	20mil	20mil	20mil
Edge	Beveled	Painted Bevel	Beveled
Overall Thickness	6mm - 0.236"	6mm - 0.236"	6mm - 0.236"
Nominal Size	7" x 48"	9" x 60"	12" x 24"
Actual Size	182mm x 1220mm	230mm x 1524mm	305mm x 609mm
Installation	Floating	Floating	Floating
Finish	Anti-Microbial + Ceramic Bead	Anti-Microbial + Ceramic Bead	Anti-Microbial + Ceramic Bead

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.52 (Dry)	≥0.52 (Dry)	≥0.52 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .036" Residual Compression		
Smoke Density: ASTM E662	Passes	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes	Passes
Phthalates: ASTM F3414-20 (CPSC)	Passes	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes	Passes
Sound Testing	HIIC 69 ΔHIIC 28 IIC 64 ΔIIC 24 STC 61 LIIC 75	HIIC 69 ΔHIIC 28 IIC 64 ΔIIC 24 STC 61 LIIC 75	HIIC 69 ΔHIIC 28 IIC 64 ΔIIC 24 STC 61 LIIC 75
FloorScore Certified: California 01350	Passes	Passes	Passes
Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point	EQ4.3- 1 Point



DOWNLOAD
SPEC SHEET



DOWNLOAD
SPEC SHEET



DOWNLOAD
SPEC SHEET



SPECIFICATIONS

Construction	Luxury Vinyl Plank (LVP)	LVP	LVP
Wear Layer Thickness	20mil	28mil	28mil
Edge	Beveled	Beveled	Beveled
Overall Thickness	4.5mm - 0.177"	5mm - 0.196"	5mm - 0.196"
Nominal Size	9" x 60"	9" x 48"	36" x 36"
Actual Size	228.6mm x 1524mm	228.6mm x 1219.2mm	914.4mm x 914.4mm
Installation	Traction / Adhesive	Traction / Adhesive	Traction / Adhesive
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System	Enhanced Polyurethane System

PERFORMANCE TESTING

Slip Resistance / ASTM D2047	≥0.69 (Dry)	≥0.8 (Dry)	≥0.8 (Dry)
Radiant Flux / ASTM E648	Class 1	Class 1	Class 1
Static Load / ASTM F970	2,000Psi .011"	2,000Psi .008"	2,000Psi .008"
Smoke Density: ASTM E662	Passes	Passes	Passes
Light Resistance: ASTM F1515	Passes	Passes	Passes
Heat Resistance / ASTM F1514	Passes	Passes	Passes
Chemical Resistance / ASTM F925	Passes	Passes	Passes
Phthalates: ASTM F3414 - 20 (CPSC)	Passes	Passes	Passes
Heavy Metals: ASTM F963	Passes	Passes	Passes
Formaldehyde: ASTM D6007	Passes	Passes	Passes

Sound Testing	HIIC Pending ΔHIIC Pending	HIIC Pending ΔHIIC Pending	HIIC Pending ΔHIIC Pending
	IIC Pending ΔIIC Pending	IIC 48 ΔIIC 11	IIC 48 ΔIIC 11
	STC Pending LIIC Pending	STC 61 LIIC Pending	STC 61 LIIC Pending

FloorScore Certified: California 01350	Passes	Passes	Passes
--	--------	--------	--------

Leed Scorecard: EQ 4.3 Low-Emitting Materials	EQ4.3 - 1 Point	EQ4.3 - 1 Point	EQ4.3- 1 Point
---	-----------------	-----------------	----------------



DOWNLOAD SPEC SHEET



DOWNLOAD SPEC SHEET



DOWNLOAD SPEC SHEET



ABSOLUTELY UNRIVALED PERFORMANCE

URBAN SURFACES
800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the U.S.A.