

x DIMENSIONLOCK

THERMALLY RESILIENT GLUEDOWN FLOORING

8 MIL / 12 MIL

Part of the Complete

DimensionLock Collection Main Street DXL | Studio 12 DXL

NO HVAC? NO ACCLIMATION? NO SWEAT!



NEVER WAIT FOR HVAC AGAIN!

Available for order now:

8 MIL **MAIN|STREET DXL**
BMIL FIBERMAX DIMENSIONLOCK LVP
10 Colors

12 MIL **STUDIO12 DXL**
12MIL FIBERMAX DIMENSIONLOCK LVP
12 Colors


FOR PERFECT INSTALLS EVERYTIME, CHOOSE THE RIGHT ADHESIVE

DXL flooring is exclusively engineered to work with our three high-performance adhesives: Omni, Everlast, and Prism. These adhesives perfectly complement the unique properties of DXL flooring, ensuring a durable bond that prevents failure and maintains warranty.



INTRODUCING MAIN STREET DXL AND STUDIO 12 DXL:

Urban Surfaces is excited to bring you these innovative flooring solutions designed to solve real-world challenges. Built with FiberMax DimensionLock (DXL) technology, these products handle extreme temperature swings, eliminating the need for acclimation from 35-125 degrees Fahrenheit. That means fewer delays and lower costs for your projects. With a fiberglass sheet layer at their core, Main Street DXL and Studio 12 DXL offer unmatched dimensional stability, making them a reliable choice for tough environments, such as new builds or vacant units without HVAC.

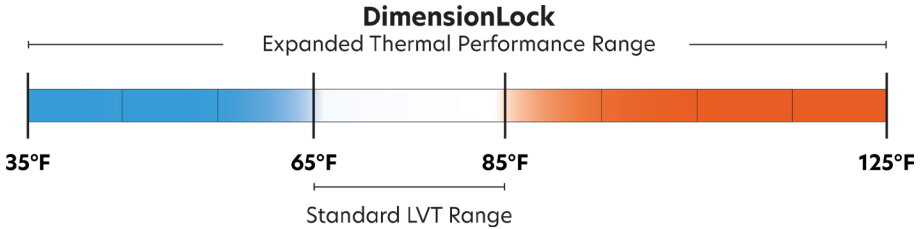

These advancements make installation faster and more efficient, giving property managers, contractors, and developers a product they can trust to perform under pressure. Available as special orders, Main Street DXL and Studio 12 DXL represent Urban Surfaces' dedication to delivering cutting-edge, customer-focused solutions. Say goodbye to delays and costly replacements. This is the flooring upgrade you've been waiting for.

Special Order

DimensionLock™ is a Special Order flooring option. Special Order products are manufactured precisely to fit your unique project requirements with lead times reflecting the highest quality and care.

Talk to your representative for details.

X DIMENSIONLOCK
THERMALLY RESILIENT GLUEDOWN FLOORING

**SAVE TIME, MONEY, AND REWORK.
GET RID OF GAPPING FOR GOOD!**

SUPERIOR THERMAL ENDURANCE



Specifications	Main Street DXL	Studio 12 DXL
Product Type	Luxury Vinyl Plank (LVP)	Luxury Vinyl Plank (LVP)
Core Material	Virgin Vinyl	Virgin Vinyl
Fiberglass Reinforced	FiberMax DimensionLock	FiberMax DimensionLock
Wear Layer	8mil ScratchGuard	12mil ScratchGuard
Embossing	Natural Wood Texture	Natural Wood Texture
Edge Profile	Square Edge	Square Edge
Overall Thickness	2mm (0.079")	2mm (0.079")
Nominal Plank Size	7" x 48"	7" x 48"
Actual Plank Size	177.8mm x 1219.2mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Temperature Range	35° F - 125° F	35° F - 125° F
Acclimation Time	No Acclimation Required	No Acclimation Required
Radiant Heat Compatible	Yes	Yes
Recommended Adhesive	3010 Prism, 3020 Everlast, or 3050 Omni	3010 Prism, 3020 Everlast, or 3050 Omni
Product Declaration	Third-Party Verified EPD And LCA	Third-Party Verified EPD And LCA

Testing

Dimensional Stability: ASTM F2199	Pending	Pending
Dimensional Stability: Internal Testing	< 0.01 inch	< 0.01 inch
Slip Resistance ASTM D2047	>0.66 (Dry)	>0.66 (Dry)
Static Load ASTM F970	2,000 PSI .005"	2,000 PSI .005"
Radiant Flux ASTM E648	Class 1	Class 1
Smoke Density ASTM E662	Passes	Passes
Light Resistance ASTM F1515	Passes	Passes
Heat Resistance ASTM F1514	Passes	Passes
Chemical Resistance ASTM F925	Passes	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals ASTM F963	Passes	Passes
Formaldehyde ASTM D6007	Passes	Passes
Floor Score Certified California 01350	Passes	Passes
Lead Scorecard EQ 4.3	1 Point	1 Point
Low-Emitting Materials		

Warranty Must use 3010 Prism, 3020 Everlast, or 3050 Omni. Refer to Warranty Guide for full details.

Residential	15 Years	20 Years
Light Commercial	5 Years	10 Years
Heavy Commercial	None	None

FOR MORE
DIMENSIONLOCK
IMAGES AND INFO VISIT
URBANSURFACES.COM

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA