

FOUNDATIONS
6 MIL SPC FLOATING FLOOR


ROCHESTER SPRINGS
1906

URBAN
SURFACES



6
MIL



BUILD ON A FOUNDATION OF QUALITY AND VALUE

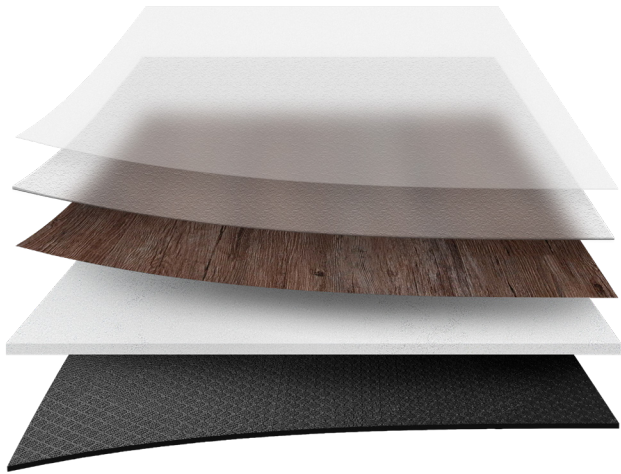

- Enhanced Polyurethane System
- 6mil ScratchGuard Wear Layer
- Natural Wood Texture
- 3.5mm High-Density Solid Core
- 1mm Sound-Reducing Underlayment



Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.



ROCHESTER SPRINGS
1906

Specifications	Floating Floor
Product Type	Stone Polymer Composite
Core Material	3.5mm High-Density Solid Core
Wear Layer	6mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Square Edge
Overall Thickness	4.5mm (0.177")
Nominal Plank Size	7" x 48"
Actual Plank Size	182mm x 1220mm
Finish	Enhanced Polyurethane System
Attached Pad	1mm Sound-Reducing Pad
Clip System	Angle-Angle Clip System
Bacteria Resistance	Standard

Testing	
Slip Resistance ASTM D2047	>0.58 (Dry)
Static Loading ASTM F970	2,000 PSI .011 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty	
Residential	10 Years
Light Commercial	3 Years
Heavy Commercial	None

