

**FOUNDATIONS**  
6 MIL SPC FLOATING FLOOR


**LONGVIEW POINT**  
1908

**URBAN**  
SURFACES



**6  
MIL**


# BUILD ON A FOUNDATION OF QUALITY AND VALUE

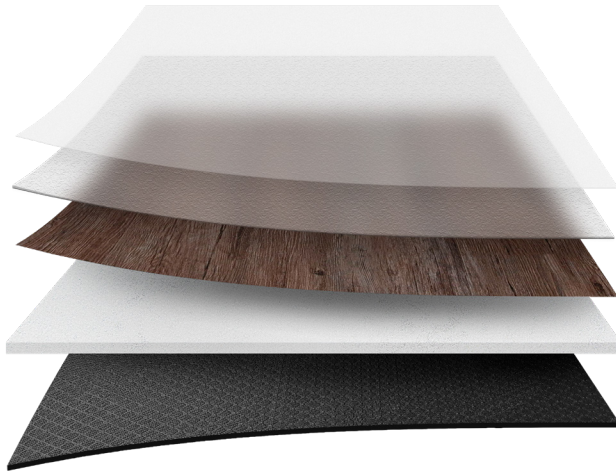

- Enhanced Polyurethane System
- 6mil ScratchGuard Wear Layer
- Natural Wood Texture
- 3.5mm High-Density Solid Core
- 1mm Sound-Reducing Underlayment



Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.



**LONGVIEW POINT**  
1908

## Specifications

## Floating Floor

Product Type	Stone Polymer Composite
Core Material	3.5mm High-Density Solid Core
Wear Layer	6mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Square Edge
Overall Thickness	4.5mm (0.177")
Nominal Plank Size	7" x 48"
Actual Plank Size	182mm x 1220mm
Finish	Enhanced Polyurethane System
Attached Pad	1mm Sound-Reducing Pad
Clip System	Angle-Angle Clip System
Bacteria Resistance	Standard

## Testing

Slip Resistance ASTM D2047	>0.58 (Dry)
Static Loading ASTM F970	2,000 PSI   .011 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

## Warranty

Residential	10 Years
Light Commercial	3 Years
Heavy Commercial	None

