

The logo for Urban Surfaces, featuring the word "URBAN" in a bold, sans-serif font above the word "SURFACES" in a smaller, all-caps sans-serif font. The text is white and set against a dark background.

URBAN
SURFACES

INSTAGRIP 20

20MIL LOOSELAY FLOORING


20
MIL

Part of the Complete
InstaGrip Collection


InstaGrip 20

InstaGrip 28


InstaGrip 28 Tile

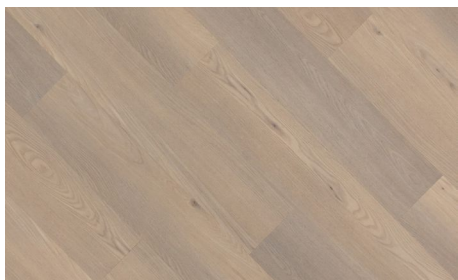


Asbury
1201

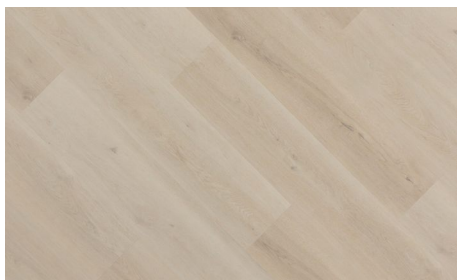


Cape Cod
1202

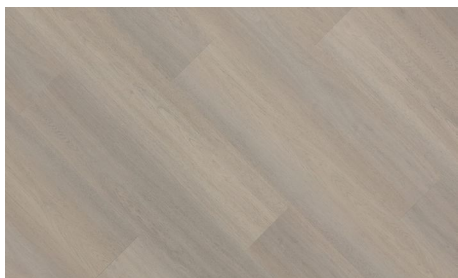


Sandbridge
1203

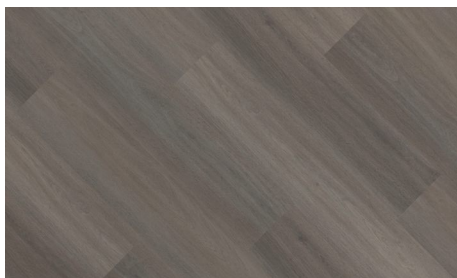


Scarborough
1204

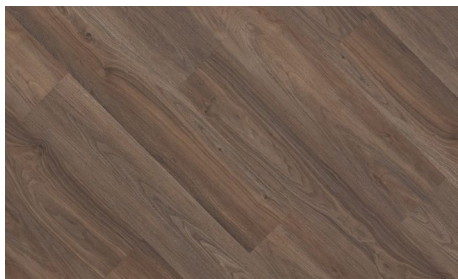


Sagamore Hill
1205

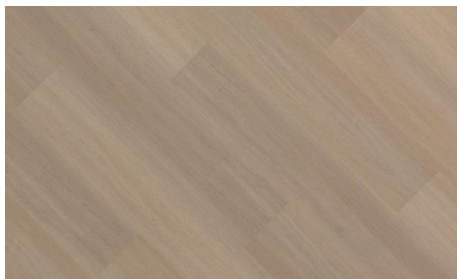

Lighthouse
1206

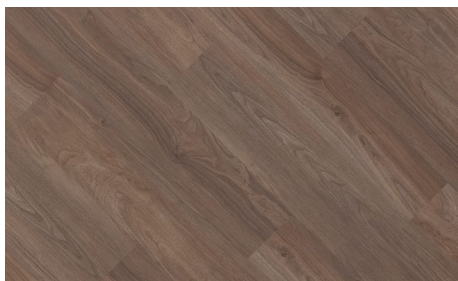

West Broadway
1224

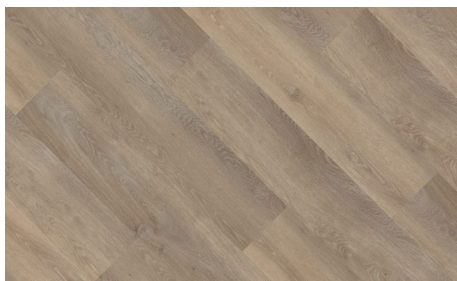

Yosemite
1299

LOOSELAY PERFECTED BEYOND MEASURE

InstaGrip 20 is our streamlined LooseLay vinyl flooring solution with a 20mil ScratchGuard wear layer and a 4.5mm pure vinyl core. Whether it is a residential or commercial space, InstaGrip 20's FiberMax fiberglass reinforcement and Grip-Tec backing ensure a steadfast installation that lasts.



Exceptional Options for Enduring Installation



LOOSELAY BECOMES THE ULTIMATE GLUEDOWN WITH EVERLAST

Heavy-duty rolling loads and frequent foot traffic pose no challenge when our thick and durable, FiberMax-reinforced InstaGrip LooseLay meets the powerful, full-spread grab of Everlast™.

- Everlast Hard-Set Adhesive provides immediate post-install access for light traffic so spaces stay occupied.



A REVOLUTIONARY SOLUTION FOR TRUE LOOSELAY

Traction™ provides fast and easy LooseLay installation without adhesive. This innovative anti-skid subfloor coating provides the horizontal grip strength of an adhesive with none of the permanence. LooseLay couldn't be easier.

- Traction also primes the subfloor and provides up to 90% moisture protection.

EXPERTLY ENGINEERED FOR UNRIVALED PERFORMANCE



Specifications	LooseLay
Product Type	Luxury Vinyl Plank (LVP)
Core Material	4.5mm Virgin Vinyl
Fiberglass Reinforced	FiberMax
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	4.5mm (0.177")
Nominal Plank Size	9" x 60"
Actual Plank Size	228.6mm x 1524mm
Finish	Enhanced Polyurethane System

Testing	
Slip Resistance ASTM D2047	>0.69 (Dry)
Static Loading ASTM F970	2,000 PSI .011"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty	
Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years



FOR MORE
INSTAGRIP 20
IMAGES AND INFO

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA