

INSTAGRIP 20

20MIL LOOSELAY FLOORING

SAGAMORE HILL


1205

URBAN
SURFACES



**20
MIL**

EXPERTLY ENGINEERED FOR UNRIVALED PERFORMANCE

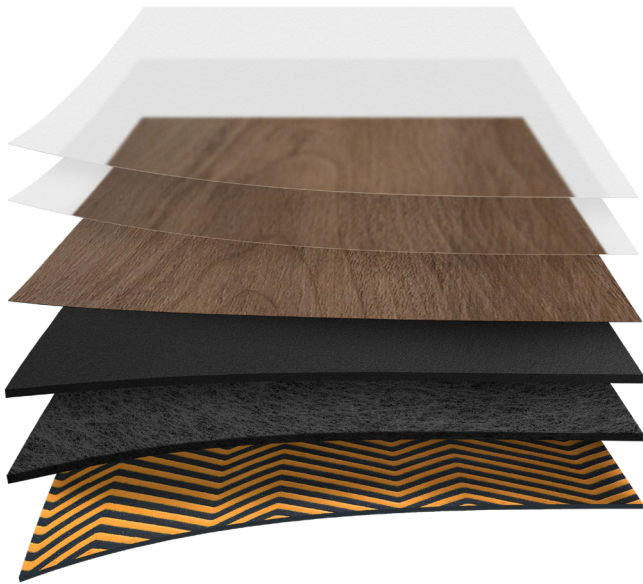

Enhanced Polyurethane System

20mil ScratchGuard Wear Layer

Natural Wood Texture

4.5mm Virgin Vinyl

Fiberglass Stabilization Layer

Grip-Tec Backing

**100%
WATERPROOF**



TRUE LOOSELAY IS FINALLY POSSIBLE WITH TRACTION

Traction™ provides fast and easy LooseLay installation without adhesive. This innovative anti-skid subfloor coating provides the horizontal grip strength of an adhesive with none of the permanence. LooseLay couldn't be easier.

- Traction also primes the subfloor and provides up to 90% moisture protection.

INSTAGRIP 20
20MIL LOOSELAY FLOORING

**URBAN
SURFACES**

SAGAMORE HILL

1205

Specifications

| Specifications | LooseLay |
|-----------------------|------------------------------|
| Product Type | Luxury Vinyl Plank (LVP) |
| Core Material | 4.5mm Virgin Vinyl |
| Fiberglass Reinforced | FiberMax |
| Wear Layer | 20mil ScratchGuard |
| Embossing | Natural Wood Texture |
| Edge Profile | Beveled Edge |
| Overall Thickness | 4.5mm (0.177") |
| Nominal Plank Size | 9" x 60" |
| Actual Plank Size | 228.6mm x 1524mm |
| Finish | Enhanced Polyurethane System |

Testing

| | |
|--|-----------------------|
| Slip Resistance ASTM D2047 | >0.69 (Dry) |
| Static Loading ASTM F970 | 2,000 PSI .011 Inch |
| Radiant Flux ASTM E648 | Class 1 |
| Smoke Density ASTM E662 | Passes |
| Light Resistance ASTM F1515 | Passes |
| Heat Resistance ASTM F1514 | Passes |
| Chemical Resistance ASTM F925 | Passes |
| Phthalates ASTM F3414 - 20 (CPSC) | Passes |
| Heavy Metals ASTM F963 | Passes |
| Formaldehyde ASTM D6007 | Passes |
| Floor Score Certified California 01350 | Passes |
| Lead Scorecard EQ 4.3 | 1 Point |
| Low-Emitting Materials | |

Warranty

| | |
|------------------|----------|
| Residential | Lifetime |
| Light Commercial | 20 Years |
| Heavy Commercial | 15 Years |



FOR MORE
INFO

