

# INSTAGRIP 28 TILE

28MIL LOOSELAY FLOORING


**28**  
MIL

Part of the Complete  
**InstaGrip Collection**


InstaGrip 20

InstaGrip 28


InstaGrip 28 Tile

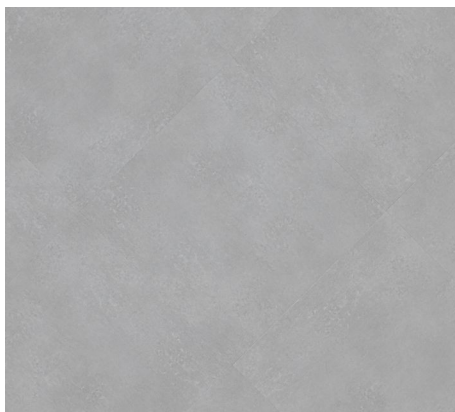


**Stratus**  
1030

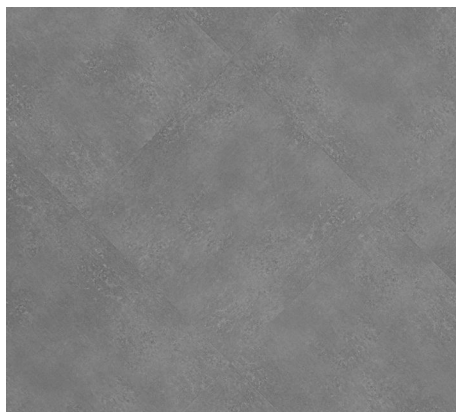


**Cloudburst**  
1031

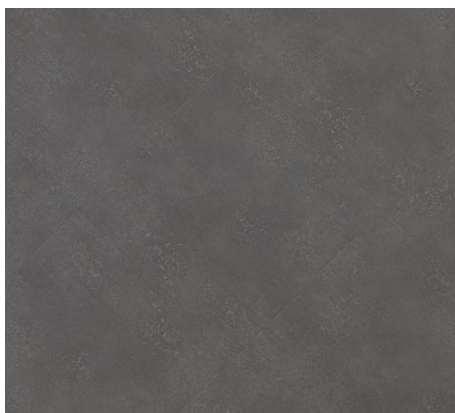


**Aurora**  
1032

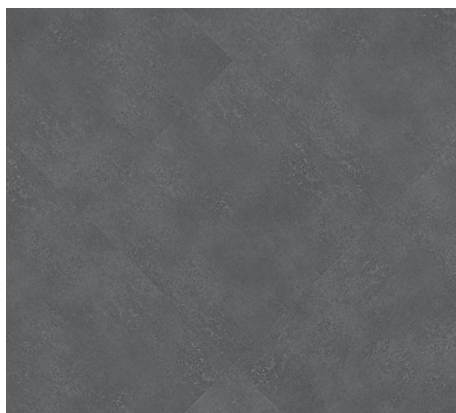

**Landfall**  
1033

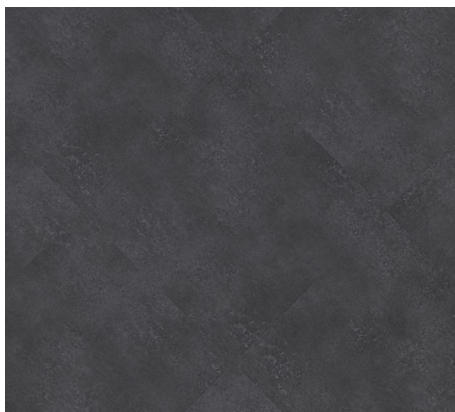


**Thunderhead**  
1034

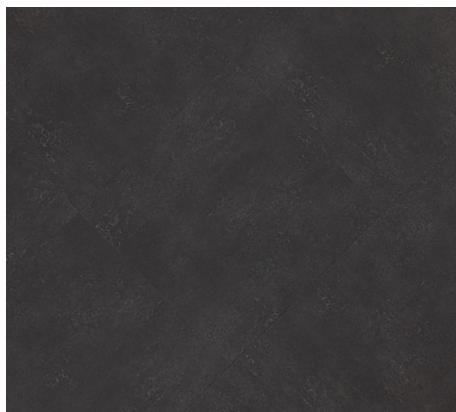

**Eclipse**  
1035

# A STUNNING 36" X 36" STATEMENT

InstaGrip 28 Tile is LooseLay vinyl flooring with an industrial and premium 36" x 36" aesthetic. This tile features highly durable 5mm vinyl construction with a concrete appearance, smooth topography, and large dimensions.

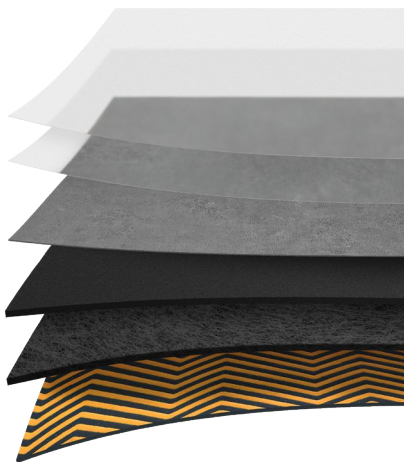

## Surprisingly Versatile and Reliably Steadfast



### TRANSFORM LOOSELAY INTO THE ULTIMATE GLUEDOWN

Heavy-duty rolling loads and frequent foot traffic pose no challenge when our thick and durable, FiberMax-reinforced InstaGrip LooseLay meets the powerful, full-spread grab of Everlast™.

- Everlast Hard-Set Adhesive provides immediate post-install access for light traffic so spaces stay occupied.



### TRUE LOOSELAY IS JUST A COAT AWAY

Traction™ provides fast and easy LooseLay installation without adhesive. This innovative anti-skid subfloor coating provides the horizontal grip strength of an adhesive with none of the permanence. LooseLay couldn't be easier.

- Traction also primes the subfloor and provides up to 90% moisture protection.

# INDUSTRIAL BEAUTY IN GRAND PROPORTIONS



Specifications	LooseLay
Product Type	Luxury Vinyl Plank (LVP)
Core Material	5mm Virgin Vinyl
Fiberglass Reinforced	FiberMax
Wear Layer	28mil ScratchGuard
Embossing	Natural Stone Texture
Edge Profile	Beveled Edge
Overall Thickness	5mm (0.196")
Nominal Plank Size	36" x 36"
Actual Plank Size	914.4mm x 914.4mm
Finish	Enhanced Polyurethane System

Testing	
Slip Resistance ASTM D2047	>0.8 (Dry)
Static Loading ASTM F970	2,000 PSI   .008"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty	
Residential	Lifetime
Light Commercial	Lifetime
Heavy Commercial	20 Years



FOR MORE  
INSTAGRIP 28 TILE  
IMAGES AND INFO

800.492.8722  
Sales@UrbanSurfaces.com  
Designed and Developed in the USA