

INSTAGRIP28TILE

28MIL LOOSELAY FLOORING

AURORA


1032

URBAN
SURFACES



28
MIL

INDUSTRIAL BEAUTY IN GRAND PROPORTIONS

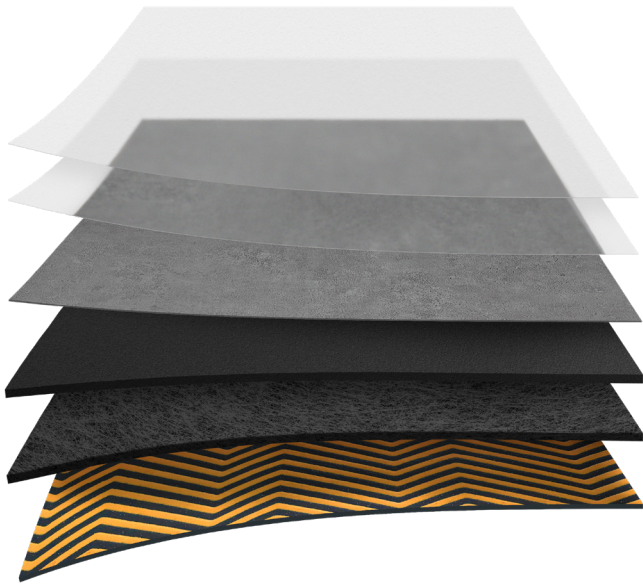

Enhanced Polyurethane System

28mil ScratchGuard Wear Layer

Natural Stone Texture

5mm Virgin Vinyl

Fiberglass Stabilization Layer

Grip-Tec Backing

100%
WATERPROOF



TRUE LOOSELAY IS FINALLY POSSIBLE WITH TRACTION

Traction™ provides fast and easy LooseLay installation without adhesive. This innovative anti-skid subfloor coating provides the horizontal grip strength of an adhesive with none of the permanence. LooseLay couldn't be easier.

- Traction also primes the subfloor and provides up to 90% moisture protection.

INSTAGRIP 28 TILE
28MIL LOOSELAY FLOORING

URBAN
SURFACES

AURORA

1032

Specifications

Specifications	LooseLay
Product Type	Luxury Vinyl Plank (LVP)
Core Material	5mm Virgin Vinyl
Fiberglass Reinforced	FiberMax
Wear Layer	28mil ScratchGuard
Embossing	Natural Stone Texture
Edge Profile	Beveled Edge
Overall Thickness	5mm (0.196")
Nominal Plank Size	36" x 36"
Actual Plank Size	914.4mm x 914.4mm
Finish	Enhanced Polyurethane System

Testing

Slip Resistance ASTM D2047	>0.8 (Dry)
Static Loading ASTM F970	2,000 PSI .008 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty

Residential	Lifetime
Light Commercial	Lifetime
Heavy Commercial	20 Years



FOR MORE
INFO

