

ECLIPSE 1035












INDUSTRIAL BEAUTY IN GRAND PROPORTIONS

INSTAGRIP 28 TILE



ECLIPSE

1035

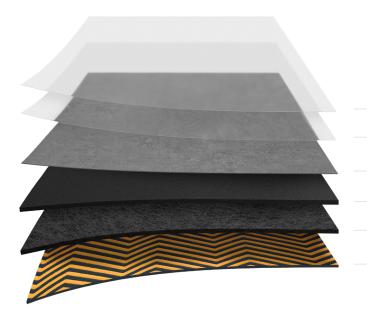

Enhanced Polyurethane System

28mil ScratchGuard Wear Layer

Natural Stone Texture

5mm Virgin Vinyl

Fiberglass Stabilization Layer

Grip-Tec Backing





TRUE LOOSELAY IS FINALLY POSSIBLE WITH TRACTION

Traction™ provides fast and easy LooseLay installation without adhesive. This innovative anti-skid subfloor coating provides the horizontal grip strength of an adhesive with none of the permanence. LooseLay couldn't be easier.

Traction also primes the subfloor and provides up to 90% moisture protection.

| Specifications | LooseLay |
|-----------------------|------------------------------|
| Product Type | Luxury Vinyl Plank (LVP) |
| Core Material | 5mm Virgin Vinyl |
| Fiberglass Reinforced | FiberMax |
| Wear Layer | 28mil ScratchGuard |
| Embossing | Natural Stone Texture |
| Edge Profile | Beveled Edge |
| Overall Thickness | 5mm (0.196") |
| Nominal Plank Size | 36" x 36" |
| Actual Plank Size | 914.4mm x 914.4mm |
| Finish | Enhanced Polyurethane System |

Testing

| Slip Resistance ASTM D2047 | >0.8 (Dry) |
|---|-----------------------|
| Static Loading ASTM F970 | 2,000 PSI .008 Inch |
| Radiant Flux ASTM E648 | Class 1 |
| Smoke Density ASTM E662 | Passes |
| Light Resistance ASTM F1515 | Passes |
| Heat Resistance ASTM F1514 | Passes |
| Chemical Resistance ASTM F925 | Passes |
| Phthalates ASTM F3414 - 20 (CPSC) | Passes |
| Heavy Metals ASTM F963 | Passes |
| Formaldehyde ASTM D6007 | Passes |
| Floor Score Certified California 01350 | Passes |
| Lead Scorecard EQ 4.3 Low-Emitting Materials | 1 Point |

Warranty

| | Residential | Lifetime |
|--|------------------|----------|
| | Light Commercial | Lifetime |
| | Heavy Commercial | 20 Years |





