

URBAN
SURFACES

INSTAGRIP 28

28MIL LOOSELAY FLOORING


28
MIL

Part of the Complete
InstaGrip Collection

InstaGrip 20

InstaGrip 28


InstaGrip 28 Tile

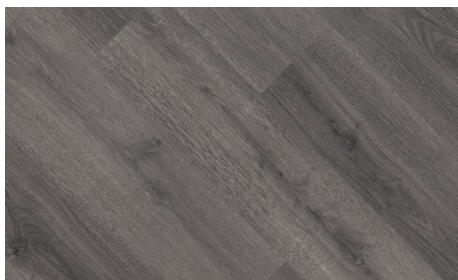


Moonstone
1001




Avalon
1002

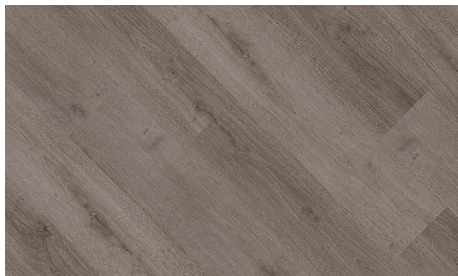


Pismo
1003

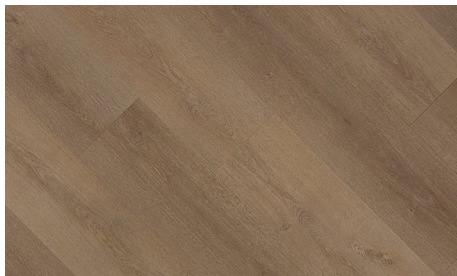


Coronado
1004

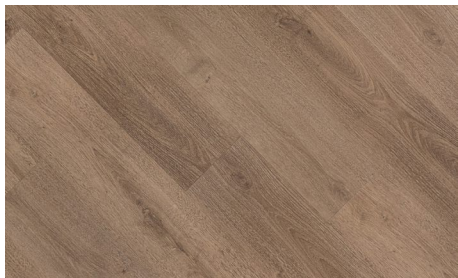


Hollister
1005

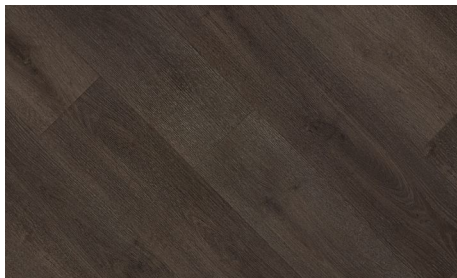

Woods Cove
1006

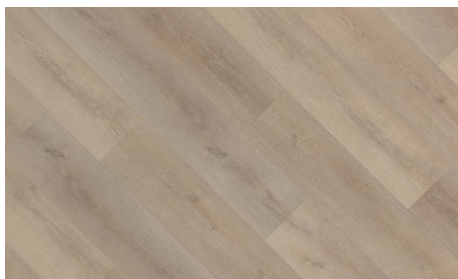

Laguna
1007

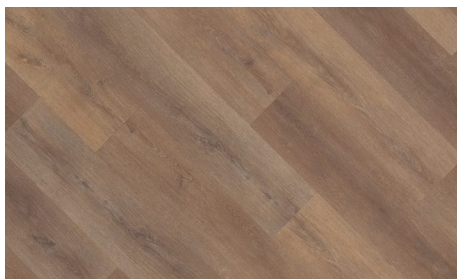

Doheny
1008

STYLE AND STRENGTH IN ABUNDANCE

InstaGrip 28 LooseLay vinyl flooring is quick to install and features heavy-duty, commercial-grade durability. The 28-mil wear layer stands up to heavy foot traffic and rolling loads while the Grip-Tec backing secures the planks to the floor with minimal adhesive.



High-Performance Installation Options



MAKE THE JUMP FROM LOOSELAY TO THE ULTIMATE GLUEDOWN

Heavy-duty rolling loads and frequent foot traffic pose no challenge when our thick and durable, FiberMax-reinforced InstaGrip LooseLay meets the powerful, full-spread grab of Everlast™.

- Everlast Hard-Set Adhesive provides immediate post-install access for light traffic so spaces stay occupied.



TRUE LOOSELAY IS FINALLY POSSIBLE WITH TRACTION

Traction™ provides fast and easy LooseLay installation without adhesive. This innovative anti-skid subfloor coating provides the horizontal grip strength of an adhesive with none of the permanence. LooseLay couldn't be easier.

- Traction also primes the subfloor and provides up to 90% moisture protection.

LESS WORK,
LESS TIME,
MORE PEACE
OF MIND

INSTAGRIP28
28MIL LOOSELAY FLOORING

Specifications	LooseLay
Product Type	Luxury Vinyl Plank (LVP)
Core Material	5mm Virgin Vinyl
Fiberglass Reinforced	FiberMax
Wear Layer	28mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	5mm (0.196")
Nominal Plank Size	9" x 48"
Actual Plank Size	228.6mm x 1219.2mm
Finish	Enhanced Polyurethane System

Testing	
Slip Resistance ASTM D2047	>0.8 (Dry)
Static Loading ASTM F970	2,000 PSI .008"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty	
Residential	Lifetime
Light Commercial	Lifetime
Heavy Commercial	20 Years



FOR MORE
INSTAGRIP 28
IMAGES AND INFO

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA