


SEDONA BRIDGE 7508







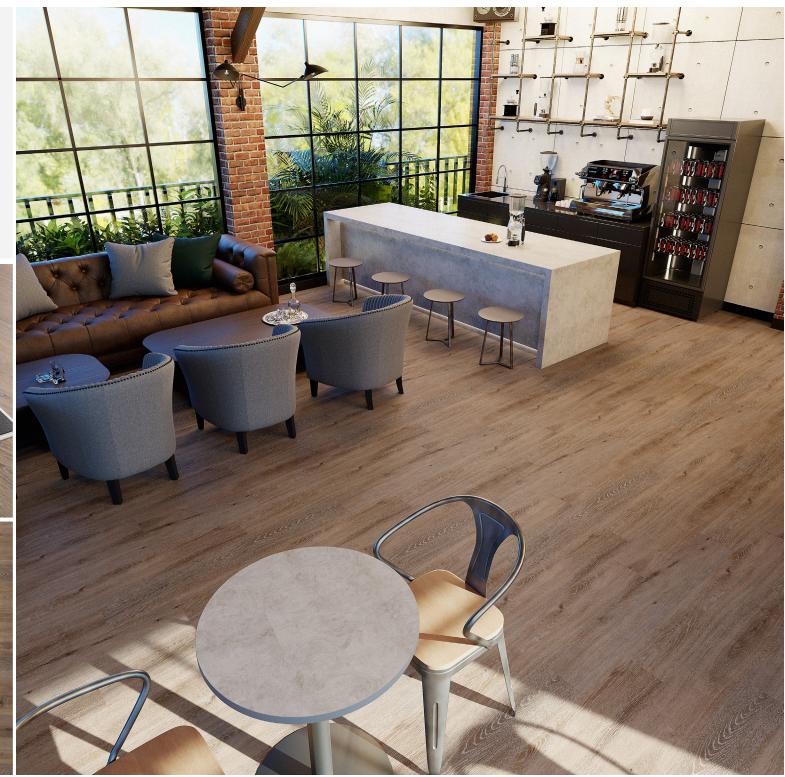

20 MIL AT THE INTERSECTION OF ART AND INDUSTRY





SEDONA BRIDGE

7508

Specifications	GlueDown
Product Type	Luxury Vinyl Plank (LVP)
Core Material	3mm Virgin Vinyl
Fiberglass Reinforced	FiberBlend
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Square Edge
Overall Thickness	3mm (0.118")
Nominal Plank Size	7" x 48"
Actual Plank Size	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System



Enhanced Polyurethane System

20mil ScratchGuard Wear Layer

Natural Wood Texture

3mm Virgin Vinyl



Testing

5	
Slip Resistance ASTM D2047	>0.69 (Dry)
Static Loading ASTM F970	2,000 PSI .011 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3 Low-Emitting Materials	1 Point

Warranty

Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years







EVERLAST IS HERE TO STAY

Everlast is true to its name with its heavy-duty, hard-set bond that handles both light-traffic and commercial applications with heavy rolling loads.

Everlast Hard-Set Adhesive provides immediate post-install access for light traffic so spaces stay occupied.



TRILOGY IS WHAT YOU NEED IT TO BE

Trilogy primes for an effective adhesive bond, setting the stage for Everlast to effectively and securely bond GlueDown LVP to the subfloor.

Provides encapsulation or up to 95% moisture protection (not simultaneously).