

URBAN  
SURFACES

# SOUND-TEC PLUS

20MIL SPC FLOORING

20  
MIL


Part of the Complete

**Sound-Tec Collection**

Sound-Tec

Sound-Tec Plus


Sound-Tec Tile

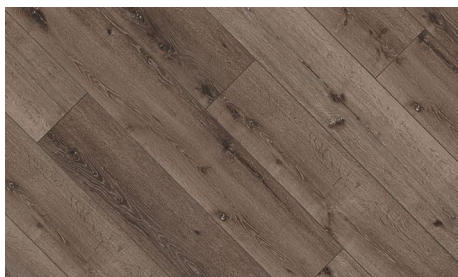


**Acadia**  
9704




**Yellowstone**  
9706

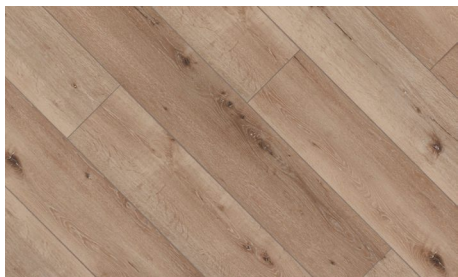


**Mount Rainier**  
9707

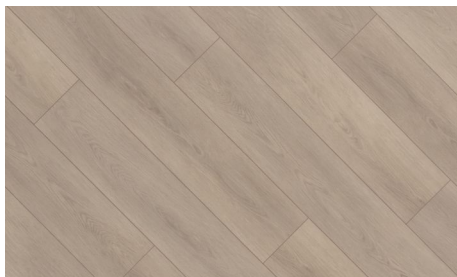


**Biscayne Bay**  
9711

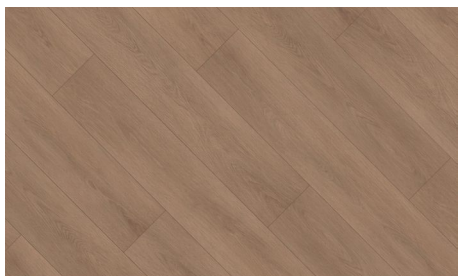


**Mount Olympia**  
9712

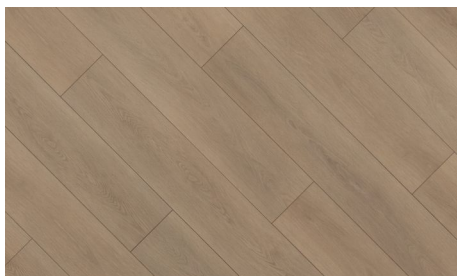

**Joshua Tree**  
9713

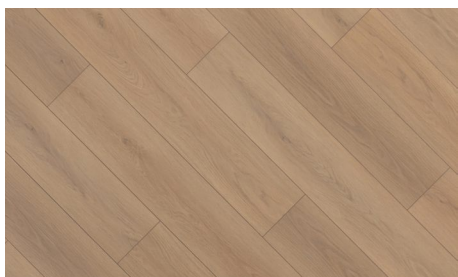



**Mesa Verde**  
9714

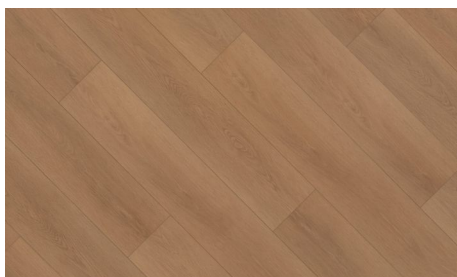

**Pinnacle Grove**  
9715

# MORE BEAUTY PER PLANK

Sound-Tec Plus takes flooring to different dimensions with its wider and longer format. The larger plank size makes for a clean and sophisticated style with a quick angle-drop installation.

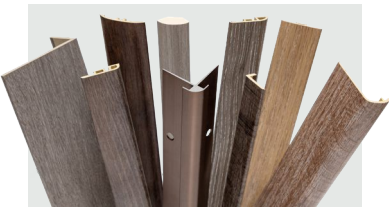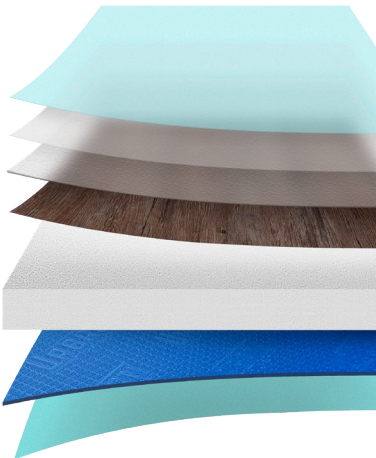

## EXACT-MATCH MOLDINGS

We are proud to provide robustly built, exact-match moldings and stair-finishing options for all of our Floating Floor lines. While other manufacturers only offer “coordinated” colors, our moldings blend perfectly.

# SILENCE IS GOLDEN



69

HIIC

69

LIIC

64

IIC

24

ΔIIC

28

ΔHIIC

61

STC



Urban Surfaces is at the cutting edge of noise-reduction technology in multi-unit spaces. With scores like these, noise complaints will be a thing of the past.

Sound Testing By  
**Veneklasen Associates**



**FLOOR  
SILENCER**  
UNDERLAYMENTS

For even better scores, choose one of our innovative FloorSilencer underlayments.



# NATURALLY STUNNING FLOORS FOR THE MODERN HOME



## Specifications

Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Painted Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	9" x 60"
Actual Plank Size	230mm x 1524mm
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

## Testing

Slip Resistance ASTM D2047	>0.52 (Dry)
Static Loading ASTM F970	2,000 PSI   .036"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

## Warranty

Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years



FOR MORE  
SOUND-TEC PLUS  
IMAGES AND INFO

800.492.8722  
Sales@UrbanSurfaces.com  
Designed and Developed in the USA