

URBAN
SURFACES

SOUND-TECTILE

20MIL SPC FLOORING


20
MIL

Part of the Complete
Sound-Tec Collection


Sound-Tec

Sound-Tec Plus


Sound-Tec Tile

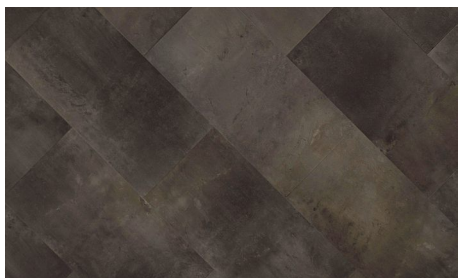


Obsidian
9603

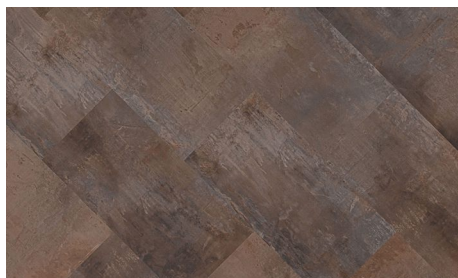


Meteor
9604

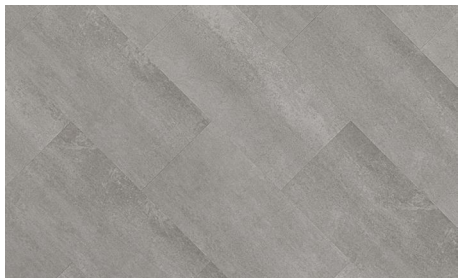


Luna
9605

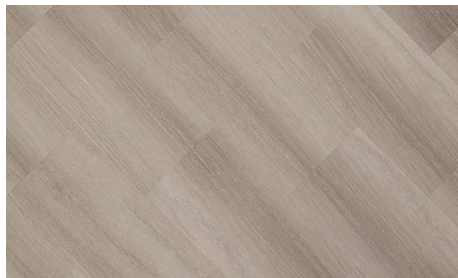

Solstice
9606

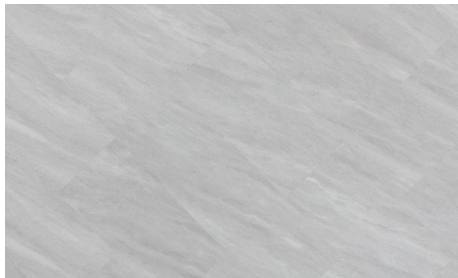


Nova
9607

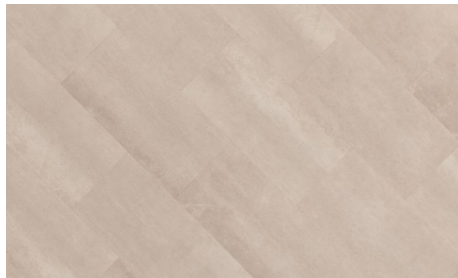

Astella
9608





Electra
9609

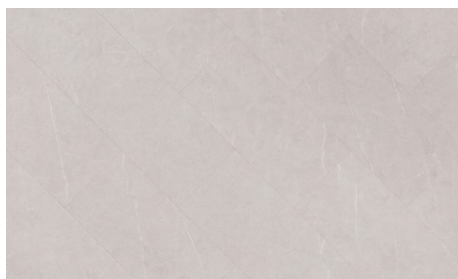

Vega
9610

ROCK-SOLID FLOORS WITH UNPARALLED NOISE REDUCTION

With its angle-drop installation, Sound-Tec Tile is a step forward in every way featuring stunning beauty, sound reduction, and durability. Gone is the hassle of ceramic flooring. Tile has never been this quick and easy.

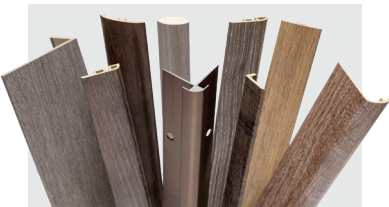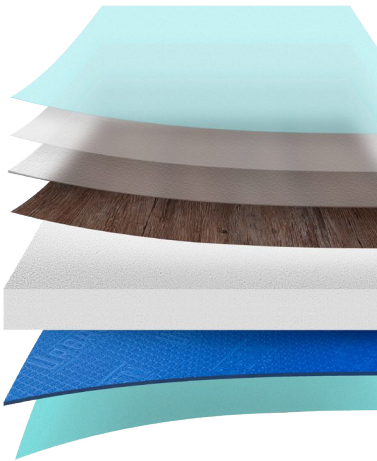

EXACT-MATCH MOLDINGS

We are proud to provide robustly built, exact-match moldings and stair-finishing options for all of our Floating Floor lines. While other manufacturers only offer “coordinated” colors, our moldings blend perfectly.

NO NOISE IS GOOD NEWS



69

HIIC

69

LIIC

64

IIC

24

Δ IIC

28

Δ HIIC

61



STC

Urban Surfaces is at the cutting edge of noise-reduction technology in multi-unit spaces. With scores like these, noise complaints will be a thing of the past.

Sound Testing By
Veneklasen Associates



For even better scores, choose one of our innovative FloorSilencer underlayments.



ELEVATE ANY SPACE WITH THE LUXURY OF STONE



Specifications	Floating Floor
Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Stone Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	12" x 24"
Actual Plank Size	305mm x 609mm
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

Testing	
Slip Resistance ASTM D2047	>0.52 (Dry)
Static Loading ASTM F970	2,000 PSI .036"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty	
Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years



FOR MORE
SOUND-TEC TILE
IMAGES AND INFO

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA