


**SOUND-TECTILE**  
20MIL SPC FLOORING


**NOVA**  
9607

**URBAN**  
SURFACES

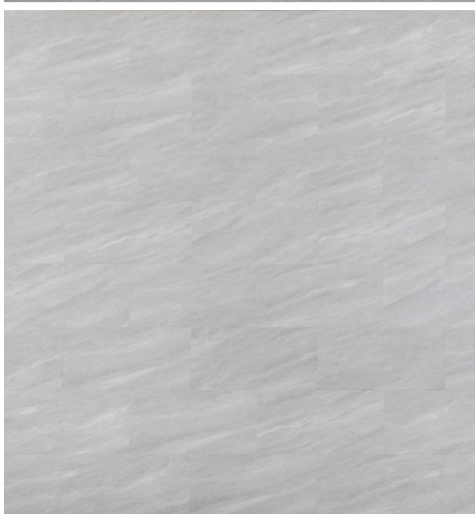

**20  
MIL**


# FOR KITCHENS, BATHS, AND FINE ART GALLERIES

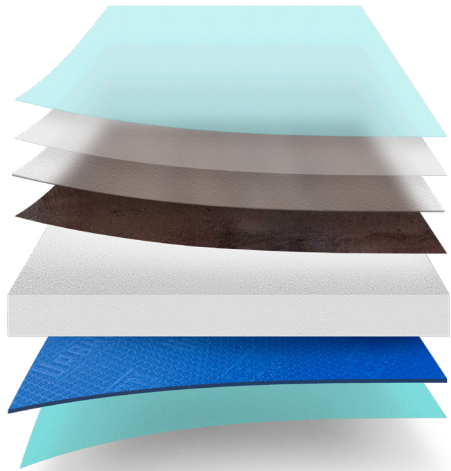

- Antimicrobial Surface Coating
- Ceramic Bead Scratch Armor
- 20mil ScratchGuard Wear Layer
- Natural Stone Texture
- 4.5mm High-Density Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection



Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.



**SOUND-TEC TILE**  
20MIL SPC FLOORING

**URBAN  
SURFACES**

**NOVA**  
9607

## Specifications

## Floating Floor

Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Stone Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	12" x 24"
Actual Plank Size	305mm x 609mm
Finish	Antimicrobial + Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

## Testing

Slip Resistance ASTM D2047	>0.52 (Dry)
Static Loading ASTM F970	2,000 PSI   .036 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

## Warranty

Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years



FOR MORE  
INFO

