


Onyx  
9602

URBAN  
SURFACES




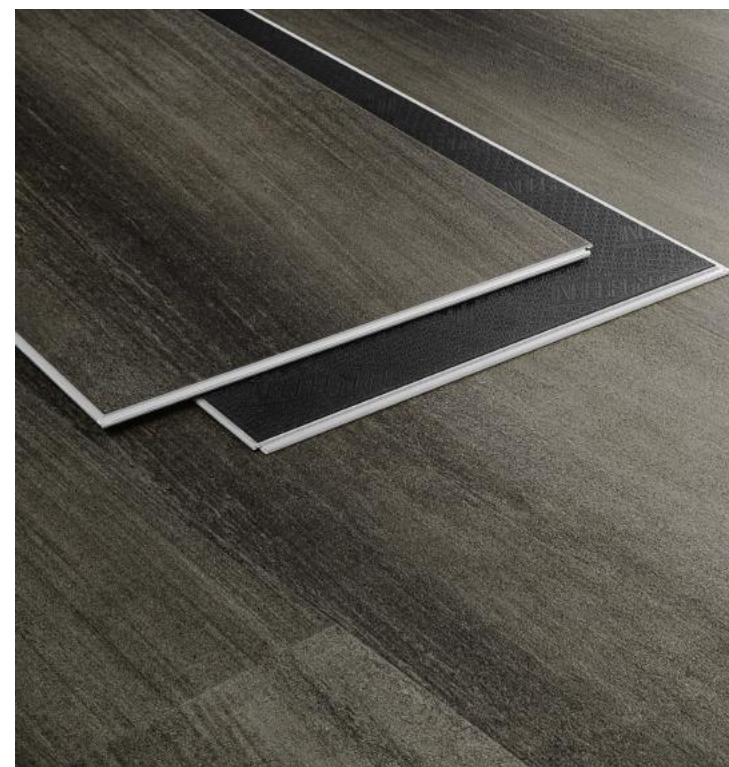

# Onyx

9602

This serene look is curated to mirror the style of stone that has been weathered by rain and water.



## Sound-Tec Tile SPC Floating Floor

Core	SPC
Size	12" x 24"
Thickness	6mm
Wear Layer	20mil
Edge Profile	Beveled
Installation	Floating
Underlayment	Sound Reducing
Sound Properties	STC 61   IIC 66   ΔIIC 21
Finish	Anti-Microbial + Ceramic Bead

### Packaging

Square Feet Per Carton	24 sqft
Pieces Per Carton	12
Weight Per Carton	45lbs
Cartons Per Pallet	54

### Environmental

Indoor Air Quality	Floor Score Certified
Lead Score Card: EQ4.3	1 Point
CHPS 01350	Passes
Phthalates: ASTM F3414 - 20	Passes

