

**URBAN**  
SURFACES

# SOUND-TEC

20MIL SPC FLOORING

**20**  
MIL

Part of the Complete  
**Sound-Tec Collection** | Sound-Tec | Sound-Tec Plus | Sound-Tec Tile



# UNPARALLELED NOISE REDUCTION



20  
MIL

## Forever Waterproof & Sound Reducing

Sound-Tec, the original sound-reducing floor, continues to outpace the competition with its impressive quality. Sound-Tec floors include antimicrobial coatings above and below to protect against harmful mold and mildew.



- Antimicrobial Surface Coating
- Ceramic Bead ScratchArmor
- 20mil ScratchGuard Wear Layer
- NaturalWood Texture
- 4.5mm HD Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection

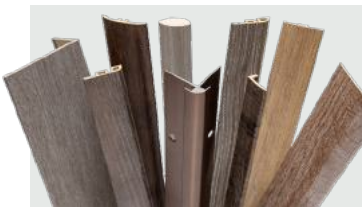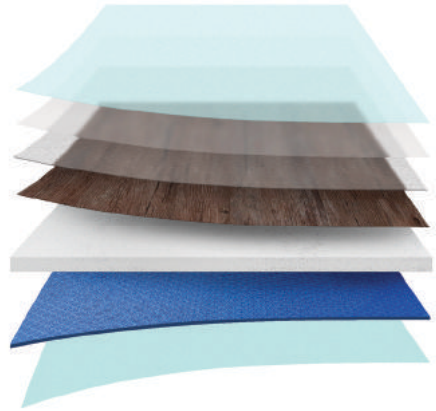

## EXACT-MATCH MOLDINGS

We are proud to provide robustly built, exact-match moldings and stair-finishing options for all of our Floating Floor lines. While other manufacturers only offer "coordinated" colors, our moldings blend perfectly.



Finish to Floors



Finish to Sliders



Finish to Cabinets



Finish to Bathtubs



Finish to Walls

# YOU DIDN'T HEAR IT FROM US

Urban Surfaces is at the cutting edge of noise-reduction technology in multi-unit spaces. With scores like these, noise complaints will be a thing of the past.

Sound Testing By  
**Veneklasen Associates**



For even better scores, choose one of our innovative FloorSilencer underlayments.



Sound Testing  
Wood Assembly  
Sound Testing 6" Concrete  
Sound Testing 6" Concrete  
with Insulation & drywall  
Sound Testing 8" Concrete

### Impact Sounds

### Ambient Sounds

High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta IIC	High Freq Delta HIIC	STC
63	43	52	--		60
59	70	57	24	28	51
69	69	64	--		61
61	75	58	--		55



Sound Testing  
Wood Assembly  
Sound Testing 6" Concrete  
Sound Testing 6" Concrete  
with Insulation & drywall  
Sound Testing 8" Concrete

### Impact Sounds

### Ambient Sounds

High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta IIC	High Freq Delta HIIC	STC
71	44	52	--		59
66	70	58	25	35	51
77	71	66	--		60
68	77	59	--		55



Sound Testing  
Wood Assembly  
Sound Testing 6" Concrete  
Sound Testing 6" Concrete  
with Insulation & drywall  
Sound Testing 8" Concrete

### Impact Sounds

### Ambient Sounds

High Frequency HIIC	Low Frequency LIIC	Standard IIC	Standard Delta IIC	High Freq Delta HIIC	STC
73	46	55	--		60
72	70	54	24	41	53
78	73	66	--		61
71	75	57	--		56

# WATERPROOF FLOORS WITH UNPARALLELED NOISE REDUCTION




## Specifications

## Floating Floor

Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	7" x 48"
Actual Plank Size	182mm x 1220mm
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat



**Boardwalk**  
9503



**Twilight**  
9505



**Sedona Bridge**  
9508



**Dakota Way**  
9509




**Monterey**  
9510




**Pembroke**  
9511




**La Jolla**  
9516




**Caspian Heights**  
9520



**Astoria**  
9521



**Cambridge**  
9523



**West Broadway**  
9524




**Midland Grey**  
9525



**Charlton Plaza**  
9526




**Sixth Avenue**  
9527



**Courtland Alley**  
9528



**Avondale**  
9529



**Fairbanks**  
9534



**Kodiak**  
9537




**Alamo**  
9538



**Cheyenne**  
9553



**Stormy Sky**  
9557



**Navajo**  
9563



**Midnight Grey**  
9573



**Yosemite**  
9599





# SOUND-TEC PLUS

20MIL SPC FLOORING

**20**  
MIL

# NATURALLY STUNNING FLOORS FOR THE MODERN HOME



## Specifications

## Floating Floor

Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Painted Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	9" x 60"
Actual Plank Size	230mm x 1524mm
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat




**Acadia**  
9704




**Yellowstone**  
9706




**Mount Rainier**  
9707

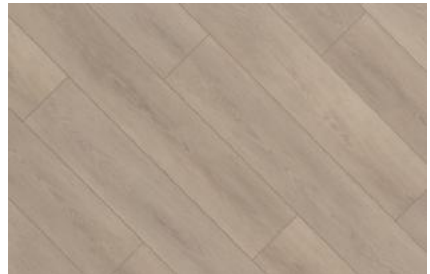


**Biscayne Bay**  
9711

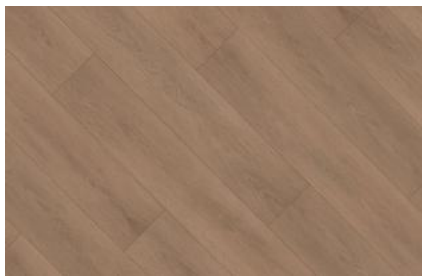


**Mount Olympia**  
9712

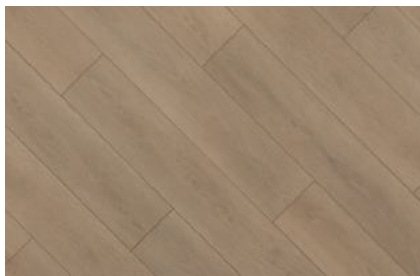


**Joshua Tree**  
9713

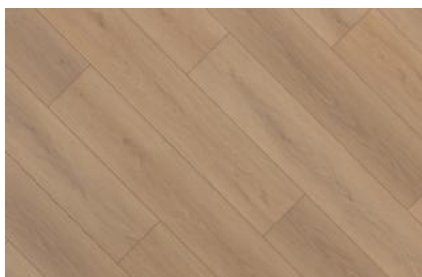

**Mesa Verde**  
9714

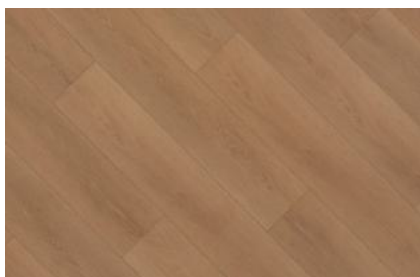

**Pinnacle Grove**  
9715

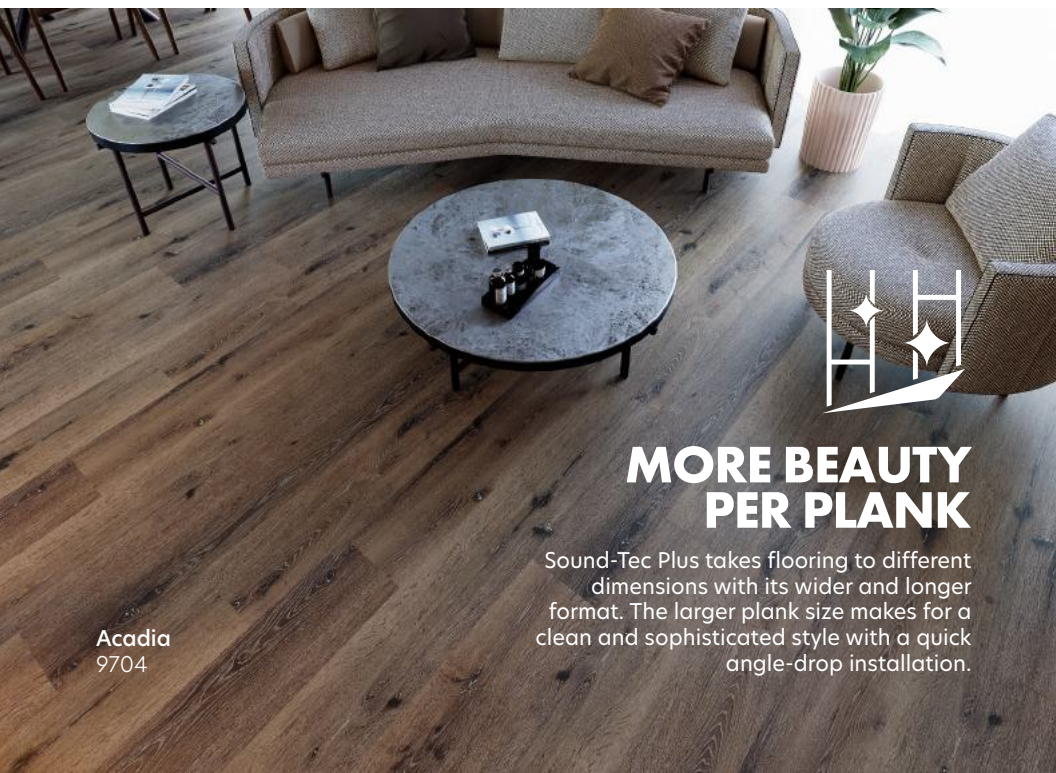

**Acadia**  
9704

## **MORE BEAUTY PER PLANK**

Sound-Tec Plus takes flooring to different dimensions with its wider and longer format. The larger plank size makes for a clean and sophisticated style with a quick angle-drop installation.





# SOUND-TECTILE

20MIL SPC FLOORING

**20**  
MIL

# ELEVATE ANY SPACE WITH THE LUXURY OF STONE



## Specifications

## Floating Floor

Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Stone Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	12" x 24"
Actual Plank Size	305mm x 609mm
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat



## ROCK-SOLID FLOORS WITH UNPARALLELED NOISE REDUCTION

With its angle-drop installation, Sound-Tec Tile is a step forward in every way featuring stunning beauty, sound reduction, and durability. Gone is the hassle of ceramic flooring. Tile has never been this quick and easy.


Meteor  
9604




**Obsidian**  
9603



**Meteor**  
9604

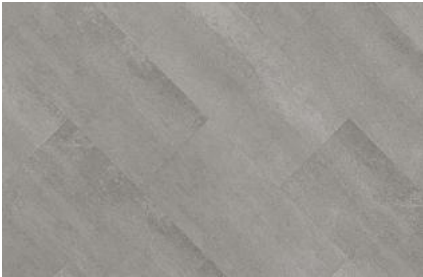


**Luna**  
9605

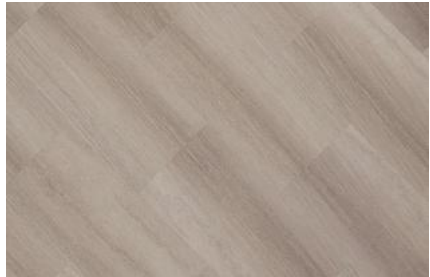

**Solstice**  
9606




**Nova**  
9607

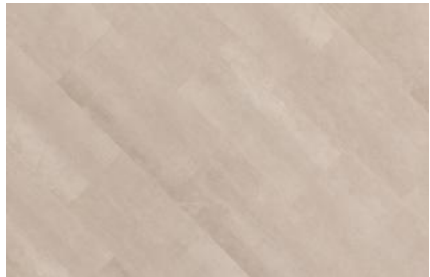

**Astella**  
9608



**Electra**  
9609

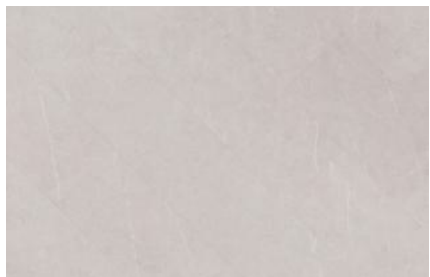

**Vega**  
9610

# WATERPROOF FLOORS WITH UNPARALLELED NOISE REDUCTION



## Specifications

Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Finish	Antimicrobial & Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

## Floating Floor

## Testing

Slip Resistance ASTM D2047	>0.52 (Dry)
Static Loading ASTM F970	2,000 PSI   .036"
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3 Low-Emitting Materials	1 Point

## Warranty

Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years

FOR MORE  
SOUND-TEC  
IMAGES AND INFO

