

SOUND-TEC
20MIL SPC FLOORING


SEDONA BRIDGE
9508

URBAN
SURFACES



**20
MIL**

WATERPROOF FLOORS WITH UNPARALLELED NOISE REDUCTION


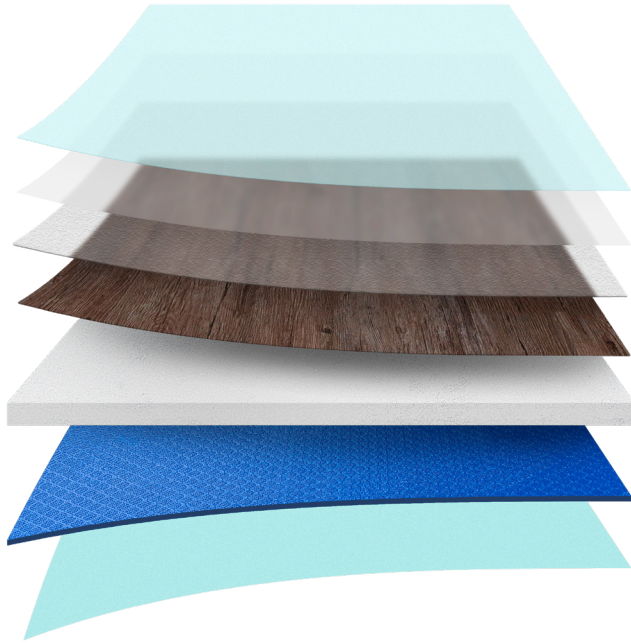


- Antimicrobial Surface Coating
- Ceramic Bead Scratch Armor
- 20mil ScratchGuard Wear Layer
- Natural Wood Texture
- 4.5mm High-Density Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection

**100%
WATERPROOF**



Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.



SEDONA BRIDGE
9508

Specifications

Specifications	Floating Floor
Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	7" x 48"
Actual Plank Size	182mm x 1220mm
Finish	Antimicrobial + Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

Testing

Slip Resistance ASTM D2047	>0.52 (Dry)
Static Loading ASTM F970	2,000 PSI .036 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3	1 Point
Low-Emitting Materials	

Warranty

Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years



FOR MORE
INFO