

SIXTH AVENUE 9527












WATERPROOF FLOORS WITH UNPARALLELED **NOISE REDUCTION**





SIXTH AVENUE

9527

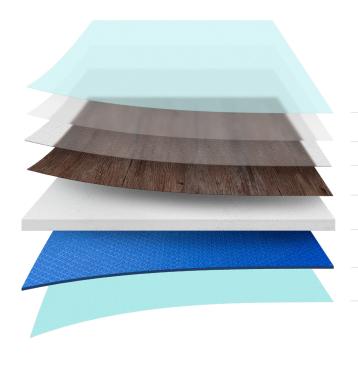

Antimicrobial Surface Coating

Ceramic Bead Scratch Armor

20mil ScratchGuard Wear Layer

Natural Wood Texture

4.5mm High-Density Solid Core

1.5mm Sound-Reducing Underlayment


Antimicrobial Pad Protection





Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.





Specifications	Floating Floor
Product Type	Stone Polymer Composite
Core Material	4.5mm High-Density Solid Core
Wear Layer	20mil ScratchGuard
Embossing	Natural Wood Texture
Edge Profile	Beveled Edge
Overall Thickness	6mm (0.236")
Nominal Plank Size	7" x 48"
Actual Plank Size	182mm x 1220mm
Finish	Antimicrobial + Ceramic Bead
Attached Pad	1.5mm Sound-Reducing & Antimicrobial Pad
Clip System	Angle-Drop Clip System
Bacteria Resistance	Bioshield Coat

Testing

Static Loading ASTM F970 Radiant Flux ASTM E648 Class 1 Smoke Density ASTM E662 Light Resistance ASTM F1515 Passes Heat Resistance ASTM F1514 Passes Chemical Resistance ASTM F925 Phthalates ASTM F3414 - 20 (CPSC) Heavy Metals ASTM F963 Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes		
Radiant Flux ASTM E648 Class 1 Smoke Density ASTM E662 Light Resistance ASTM F1515 Passes Heat Resistance ASTM F1514 Chemical Resistance ASTM F925 Phthalates ASTM F3414 - 20 (CPSC) Passes Pheavy Metals ASTM F963 Pormaldehyde ASTM D6007 Plasses Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3	Slip Resistance ASTM D2047	>0.52 (Dry)
Smoke Density ASTM E662 Light Resistance ASTM F1515 Heat Resistance ASTM F1514 Passes Chemical Resistance ASTM F925 Phthalates ASTM F3414 - 20 (CPSC) Heavy Metals ASTM F963 Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Lead Scorecard EQ 4.3	Static Loading ASTM F970	2,000 PSI .036 Inch
Light Resistance ASTM F1515 Passes Heat Resistance ASTM F1514 Passes Chemical Resistance ASTM F925 Phthalates ASTM F3414 - 20 (CPSC) Passes Heavy Metals ASTM F963 Passes Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3	Radiant Flux ASTM E648	Class 1
Heat Resistance ASTM F1514 Passes Chemical Resistance ASTM F925 Phthalates ASTM F3414 - 20 (CPSC) Passes Heavy Metals ASTM F963 Passes Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3	Smoke Density ASTM E662	Passes
Chemical Resistance ASTM F925 Phthalates ASTM F3414 - 20 (CPSC) Passes Heavy Metals ASTM F963 Passes Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3	Light Resistance ASTM F1515	Passes
Phthalates ASTM F3414 - 20 (CPSC) Passes Heavy Metals ASTM F963 Passes Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3 1 Point	Heat Resistance ASTM F1514	Passes
Heavy Metals ASTM F963 Passes Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3 1 Point	Chemical Resistance ASTM F925	Passes
Formaldehyde ASTM D6007 Passes Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3 1 Point	Phthalates ASTM F3414 - 20 (CPSC)	Passes
Floor Score Certified California 01350 Passes Lead Scorecard EQ 4.3 1 Point	Heavy Metals ASTM F963	Passes
Lead Scorecard EQ 4.3 1 Point	Formaldehyde ASTM D6007	Passes
	Floor Score Certified California 01350	Passes
		1 Point

Warranty

Residential	Lifetime
Light Commercial	20 Years
Heavy Commercial	15 Years





