

SOUND-TEC
20MIL SPC FLOORING


NAVAJO
9563

URBAN
SURFACES



**20
MIL**

WATERPROOF FLOORS WITH UNPARALLELED NOISE REDUCTION


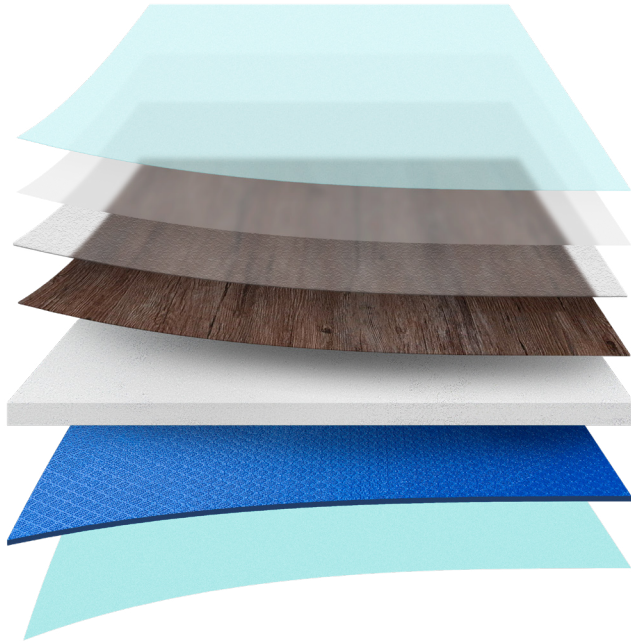


- Antimicrobial Surface Coating
- Ceramic Bead Scratch Armor
- 20mil ScratchGuard Wear Layer
- Natural Wood Texture
- 4.5mm High-Density Solid Core
- 1.5mm Sound-Reducing Underlayment
- Antimicrobial Pad Protection

**100%
WATERPROOF**



Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.



NAVAJO
9563

Specifications

Floating Floor

| | |
|---------------------|--|
| Product Type | Stone Polymer Composite |
| Core Material | 4.5mm High-Density Solid Core |
| Wear Layer | 20mil ScratchGuard |
| Embossing | Natural Wood Texture |
| Edge Profile | Beveled Edge |
| Overall Thickness | 6mm (0.236") |
| Nominal Plank Size | 7" x 48" |
| Actual Plank Size | 182mm x 1220mm |
| Finish | Antimicrobial + Ceramic Bead |
| Attached Pad | 1.5mm Sound-Reducing & Antimicrobial Pad |
| Clip System | Angle-Drop Clip System |
| Bacteria Resistance | Bioshield Coat |

Testing

| | |
|--|-----------------------|
| Slip Resistance ASTM D2047 | >0.52 (Dry) |
| Static Loading ASTM F970 | 2,000 PSI .036 Inch |
| Radiant Flux ASTM E648 | Class 1 |
| Smoke Density ASTM E662 | Passes |
| Light Resistance ASTM F1515 | Passes |
| Heat Resistance ASTM F1514 | Passes |
| Chemical Resistance ASTM F925 | Passes |
| Phthalates ASTM F3414 - 20 (CPSC) | Passes |
| Heavy Metals ASTM F963 | Passes |
| Formaldehyde ASTM D6007 | Passes |
| Floor Score Certified California 01350 | Passes |
| Lead Scorecard EQ 4.3 | 1 Point |
| Low-Emitting Materials | |

Warranty

| | |
|------------------|----------|
| Residential | Lifetime |
| Light Commercial | 20 Years |
| Heavy Commercial | 15 Years |



FOR MORE
INFO