

STUDIO12
12MIL SPC FLOATING FLOOR

CHESTNUT
Floating Floor 2906
GlueDown 2106


URBAN
SURFACES



**12
MIL**

FINISH PROJECTS ON TIME AND UNDER BUDGET

Floating Floor

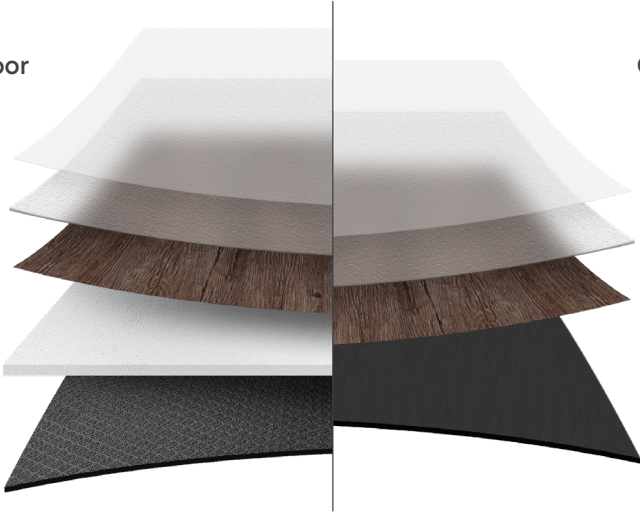


GlueDown

**100%
WATERPROOF**



Get even better noise reduction with one of our FloorSilencer underlayments. You didn't hear it from us.

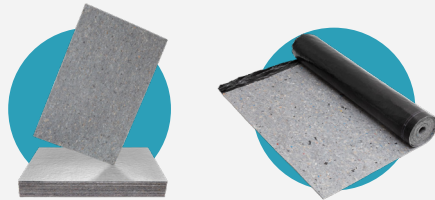

GLUEDOWN THAT STAYS DOWN

No matter what your project needs, the versatile variety of adhesives found in our Urban Essentials line has it covered with hard-set and firm-set adhesives, integrated priming, encapsulation, moisture protection, and more.

- Everlast Hard-Set Adhesive provides immediate post-install access for light traffic so spaces stay occupied.



Chestnut

Floating Floor 2906 | GlueDown 2106

Specifications

	Floating Floor	GlueDown Floor
Product Type	Stone Polymer Composite	Luxury Vinyl Plank (LVP)
Core Material	4mm High-Density Solid Core	2mm Virgin Vinyl
Fiberglass Reinforced	N/A	FiberBlend
Wear Layer	12mil ScratchGuard	12mil ScratchGuard
Embossing	Natural Wood Texture	Natural Wood Texture
Edge Profile	Beveled Edge	Square Edge
Overall Thickness	5mm (0.196")	2mm (0.079")
Nominal Plank Size	7" x 48"	7" x 48"
Actual Plank Size	182mm x 1220mm	177.8mm x 1219.2mm
Finish	Enhanced Polyurethane System	Enhanced Polyurethane System
Attached Pad	1mm Sound-Reducing Pad	N/A
Clip System	Angle Drop	N/A

Testing

Slip Resistance ASTM D2047	>0.69 (Dry)	>0.66 (Dry)
Static Loading ASTM F970	2,000 PSI .011"	2,000 PSI .005"
Radiant Flux ASTM E648	Class 1	Class 1
Smoke Density ASTM E662	Passes	Passes
Light Resistance ASTM F1515	Passes	Passes
Heat Resistance ASTM F1514	Passes	Passes
Chemical Resistance ASTM F925	Passes	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes	Passes
Heavy Metals ASTM F963	Passes	Passes
Formaldehyde ASTM D6007	Passes	Passes
Floor Score Certified California 01350	Passes	Passes
Lead Scorecard EQ 4.3	1 Point	1 Point
Low-Emitting Materials		

Warranty

Residential	20 Years	20 Years
Light Commercial	10 Years	10 Years



FOR MORE
INFO

