


URBAN
SURFACES




ZENOPVCFREE

RESILIENT GUEWDOWN FLOORING


12/20
MIL / MIL




Fuji Mist
10501




Nara Grove
10502




Tea House
10503




Hana Blossom
10504




Kasumi Oak
10505




Misora Meadow
10506




Crane Lake
10507




Onsen Retreat
10508




Rooftop Garden
10509



Sakura Breeze
10510



Nachi Falls
10511




Oboro Ash
10512

CLEAN, GREEN, PVC-FREE

Zeno PVC-Free™ Resilient GlueDown flooring is a sustainable, high-performance option made from recycled food-grade polypropylene. It is free from chemicals like PVC and plasticizers, making it an eco-friendly choice.

Special Order

Zeno PVC-Free™ is a Special Order flooring line. Special Order products are manufactured precisely to fit your unique project requirements with lead times reflecting the highest quality and care. Also available with an attached 1mm Sound-Reducing PET acoustic underlay.

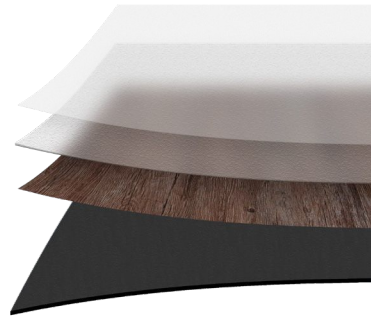

Leading the Way in Sustainable Flooring Innovation

50%

Pre-Consumer Food Grade
Recycled Polypropylene

Sustainably Sourced

Made with 50% recycled food-grade polypropylene, this product transforms unused food containers, like yogurt cups, into a durable, high-quality, and sustainable resource, reducing environmental impact.



Perfect Bond, Perfect Floor: Adhesives for PVC-Free Flooring

Discover the ideal bond for your PVC-free flooring with our durable, stylish adhesives: 3010 Prism, 3020 Everlast, and 3050 Omni. Engineered for flawless installation and eco-friendly performance.



SUSTAINABILITY AND STYLE IN HARMONY

Specifications

Product Type	PVC-Free Resilient
Core Material	Polypropylene
Wear Layer	PVC-Free Scratch Guard - 12mil 20mil
Overall Thickness	3mm (0.118") - 12mil 20mil 4mm (0.157") - 12mil + Underlay 20mil + Underlay
Nominal Plank Size	7" x 48"
Actual Plank Size	177.8mm x 1219.2mm
Edge Profile	Square Edge
Embossing	Natural Wood Texture
Finish	Enhanced Polyurethane
Wellness Assurance	Contains no PVC, plasticizers, phthalates, halogens, chlorines or heavy metals
Recycled Content	50% Pre-Consumer Food-Grade Polypropylene
Recyclability	100% Recyclable
Product Declarations	Third Party Verified LCA

Testing

Slip Resistance ASTM D2047	>0.88 (Dry)
Static Loading ASTM F970	3000 PSI .004 Inch With Underlay 2000 PSI .008 Inch
Radiant Flux ASTM E648	Class 1
Smoke Density ASTM E662	Passes
Light Resistance ASTM F1515	Passes
Heat Resistance ASTM F1514	Passes
Chemical Resistance ASTM F925	Passes
Phthalates ASTM F3414 - 20 (CPSC)	Passes
Heavy Metals ASTM F963	Passes
Formaldehyde ASTM D6007	Passes
Floor Score Certified California 01350	Passes
Lead Scorecard EQ 4.3 Low-Emitting Materials	1 Point

Warranty

	12mil	20mil
Residential	20 Years	Lifetime
Light Commercial	10 Years	20 Years
Heavy Commercial	None	15 Years



FOR MORE
ZENO PVC FREE
IMAGES AND INFO

800.492.8722
Sales@UrbanSurfaces.com
Designed and Developed in the USA