



NO NEED TO TIPTOE



Made in the U.S.A.



The multipurpose underlayment
for vinyl planks.

Sound Control

Moisture Protection

Extra Comfort



Sound Testing By
Veneklasen Associates



HIIC	LIIC	IIC	Δ IIC	Δ HIIC
77	71	66	25	35

Approved Substrates

Dry, completely cured concrete
(at least 28 days old)


Concrete and masonry blocks

Cement backer units (CBU)

Cement terrazzo floors

Waterproofing and crack-isolation
membranes

Wood, plywood, or OSB subfloors that
meet NAWFA Subfloor Guidelines and
Specifications, and meet applicable
building codes

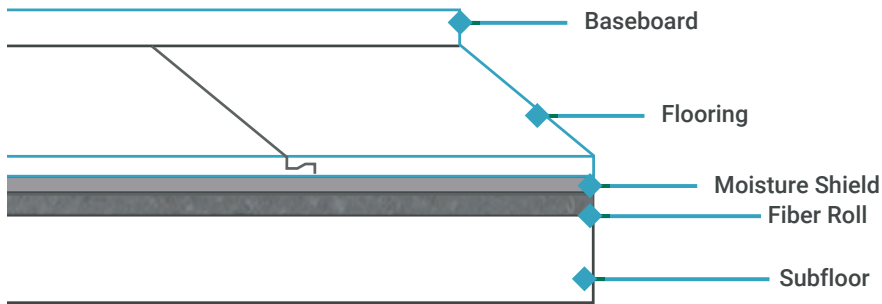

Proudly made in the USA.

Eligible for LEED credit.

MR 4.1 - 4.2 recycled content


MR 5.1 - 5.2 regional content

EQ 4.3 low emitting VOC's




SOUND CONTROL

The fiber layer blocks sound
from traveling between levels
and provides additional sound
buffering for our flooring.



MOISTURE PROTECTION

Breathable fibers allow the
subfloor to disperse moisture.
In addition, the moisture barrier
blocks fluids and pH extremes.

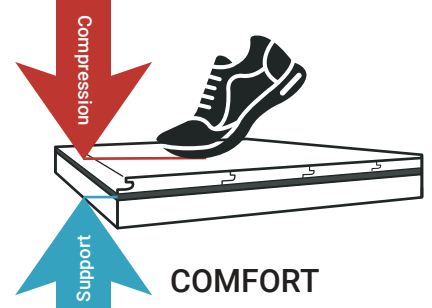

COMFORT

Dense recycled fiber structure
supports the floor, provides
comfort, and will not lose
integrity.

Size	6' x 60' Roll	R-Value	.528 hr - ft ² - degF/Btu
Coverage	360 sqft	Approved for Use with Radiant Heat Systems	
Density	18.28 lbs / ft ³	Antimicrobial Protection	
Moisture Emissions Protection	6 lbs / 1000ft ² / 24hrs		
Thickness	1.4mm		
Weight	30lbs per Roll		



URBAN SURFACES

800.496.8722

info@urbansurfaces.com

sales@urbansurfaces.com