

ADHESIVES

REQUIRED TESTING



PRISM

3010 | FIRM-SET ADHESIVE

Bonds subfloor to GlueDown LVT for light-traffic conditions. Make sure to use the proper trowel based on porosity and primer usage. Coverage: 150 - 260 sqft/gal

RH Tolerance	99%
pH Tolerance	5-12
MVER	Up to 12 lbs



EVERLAST

3020 | HARD-SET ADHESIVE

Bonds subfloor to GlueDown LVT for light-traffic and commercial applications. Make sure to use the proper trowel based on porosity and primer usage. Coverage: 150 - 260 sqft/gal

RH Tolerance	99%
pH Tolerance	5-12
MVER	Up to 12 lbs



OMNI

3050 | ADHESIVE & MOISTURE BARRIER

Does it all in one step. Commercial-grade adhesive for GlueDown LVT, primer, and unlimited moisture protection. No moisture testing required. Coverage: 75 -250 sqft/gal

RH Tolerance	100%
pH	No Test Required
MVER	No Test Required



ASCEND

3080 | WALL ADHESIVE

Adhesive for application of LVT to vertical surfaces. Create a beautifully unique look for walls by using 2mm or thinner flooring. Coverage: 250 - 300 sqft/gal

RH Tolerance	N/A
pH Tolerance	N/A
MVER	N/A



STRONGHOLD

3070 | MOLDING & STAIR TREAD ADHESIVE

Ensures that moldings stay put. High-strength, flexibly bonded, and resistant to high alkalinity. Comes in tube for use with a caulking gun.

RH Tolerance	N/A
pH Tolerance	N/A
MVER	N/A

SUBFLOOR COATINGS

REQUIRED TESTING



TRACTION

3545 | SUBFLOOR GRIP COATING

Fast and easy LooseLay installation. Not an adhesive. Provides horizontal grip, priming, and up to 90% moisture protection. Replace planks without reapplication. Coverage: 1 Coat: 350 sqft/gal | 2 Coats: 200 sqft/gal

RH Tolerance	85-90%
pH Tolerance	5-12
MVER	Up to 10 lbs



ADVANTAGE

3505 | SUBFLOOR PRIMER

Primes for an effective adhesive bond to subfloor. Protects against alkali attack. Apply after appropriate moisture protection. Coverage: 300 - 450 sqft/gal

RH Tolerance	75%
pH Tolerance	5-14
MVER	Up to 5 lbs



TRILOGY

3525 | MULTIPURPOSE PRIMER

Primes for an effective adhesive bond. Provides encapsulation or up to 95% moisture protection (not simultaneously). Coverage: 1 Coat: 350 sqft/gal | 2 Coats: 200 sqft/gal

RH Tolerance	93-95%
pH Tolerance	5-14
MVER	Up to 10-15 lbs



INFUSE

3515 | ENCAPSULATOR & PRIMER

Encapsulates adhesive residue and primes for an effective bond to subfloor. Protects against alkali attack. Apply after any needed moisture protection. Coverage: Up to 250 sqft/gal

RH Tolerance	90%
pH Tolerance	5-14
MVER	Up to 8 lbs




INFINITI

3535 | MOISTURE PROTECTION

Provides 100% moisture protection, no testing required. Before applying adhesive, use Infuse Encapsulator & Primer. Coverage: 90 - 120 sqft/gal

RH	No Test Required
pH	No Test Required
MVER	No Test Required

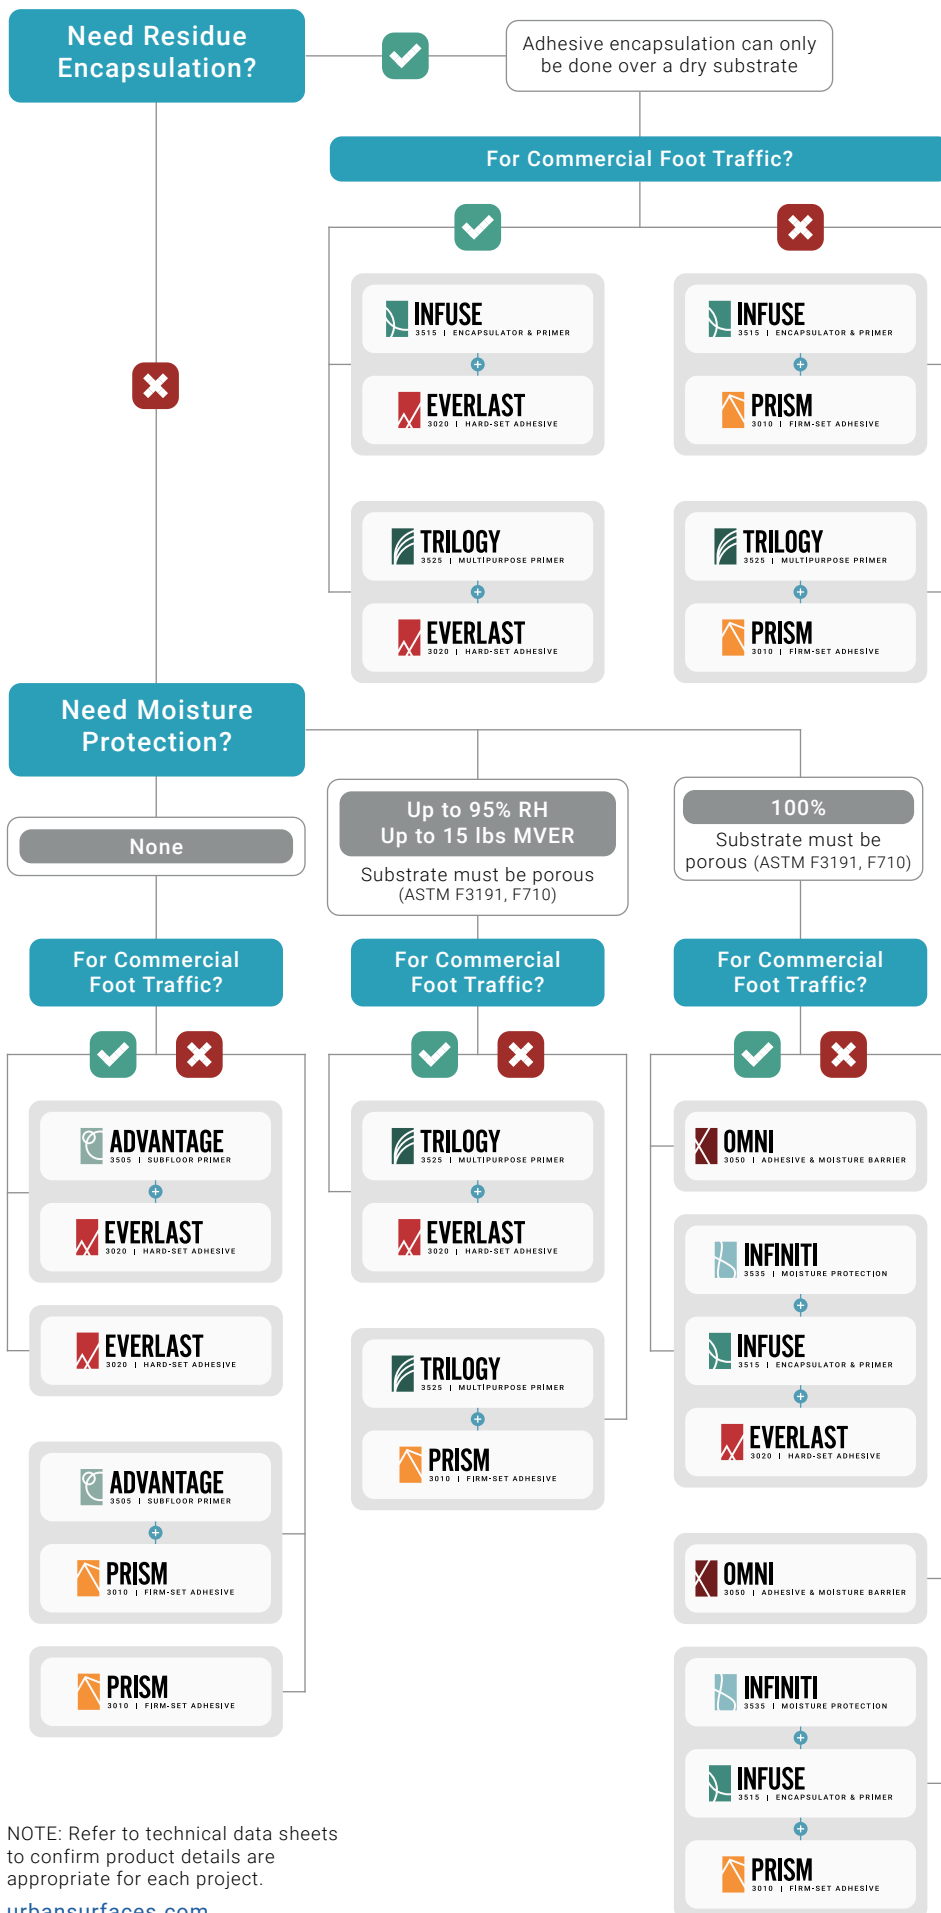

Find the Right Combination for Your Projects.

OMNI

- ✓ 100% Moisture Protection
- ✓ pH Blocking
- ✓ Commercial Traffic

INFINITI + INFUSE + EVERLAST

- ✓ 100% Moisture Protection
- ✓ pH Blocking
- ✓ Commercial Traffic

INFINITI + INFUSE + PRISM

- ✓ 100% Moisture Protection
- ✓ pH Blocking

TRILOGY + EVERLAST

- ✓ pH Blocking
- ✓ Commercial Traffic
- ✓ Residue Encapsulation or 93-95% Moisture Protection

TRILOGY + PRISM

- ✓ pH Blocking
- ✓ Residue Encapsulation or 93-95% Moisture Protection

INFUSE + EVERLAST

- ✓ pH Blocking
- ✓ Residue Encapsulation
- ✓ Commercial Traffic
- ✗ 0% Moisture Protection

INFUSE + PRISM

- ✓ pH Blocking
- ✓ Residue Encapsulation
- ✗ 0% Moisture Protection

ADVANTAGE + EVERLAST

- ✓ pH Blocking
- ✓ Commercial Traffic
- ✗ 0% Moisture Protection

ADVANTAGE + PRISM

- ✓ pH Blocking
- ✗ 0% Moisture Protection

EVERLAST

- ✓ Commercial Traffic
- ✗ 0% Moisture or pH Protection

PRISM

- ✗ 0% Moisture or pH Protection

NOTE: Refer to technical data sheets to confirm product details are appropriate for each project.

urbansurfaces.com